



Bulkhead




Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The BH200 series designed for outdoor environments with complete IP65 protection. Marine grade LM6 die-cast aluminium construction provides unrivalled exterior protection against the harshest of climates.

The BH200 series bulkhead provides brilliant and consistent illumination to walkways, corridors and is perfect for general illumination in various external spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

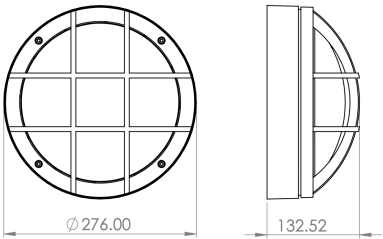

APPLICATIONS

Industrial, Security, Commercial, General

	Standard	SELECT
Luminaire total power (W):	12 - 23W	Varies
Lamp luminous flux*:	2100 - 3350lm	Varies
Luminaire luminous flux*:	1450 - 2350lm	Varies
Luminaire efficacy*:	102 - 121lm/W	Varies
Beam Angle:	120°	120°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	3000K, 4000K, 6500K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	LM6 Aluminium	LM6 Aluminium
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black, White, Grey	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

