

Walkway





Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Designed for outdoor environments with complete IP54 protection. Complete 316 Stainless Steel construction provides unrivalled exterior protection against the harshest of climates. Recessed mounting provides seamless integration without obtrusion. Stainless Steel mounting boxes provide added ingress protection and ease of installation.

The W100 provides illumination in walkways, stairs and other low-level applications. The concealed light source minimizes glare and creates sufficient projection on to the intended area, with the option of low, medium and high lumen outputs to suit your specific application

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

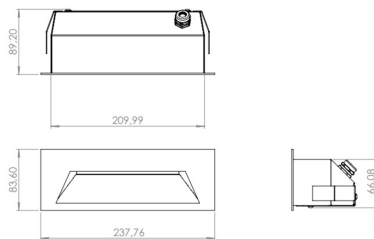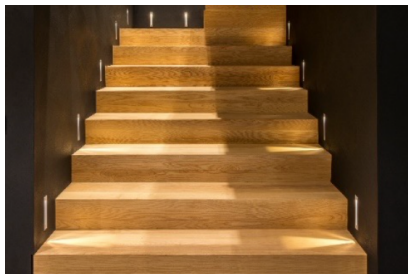

APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		Select
Luminaire total power (W)	3W	6W	3W - 6W
Lamp luminous flux*:	505lm	1035lm	505 - 1035lm
Luminaire luminous flux*:	355lm	725lm	355 - 725lm
Luminaire efficacy*:	118lm/W	125lm/W	118 - 125lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	80		70 - 97
Body Construction:	316 Stainless Steel		316 Stainless Steel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	Black		Optional
Dimensions:	238mm X 84mm X 66mm		238mm X 84mm X 66mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%