


Surface/Suspended Linear - 0.6m Integrated Driver

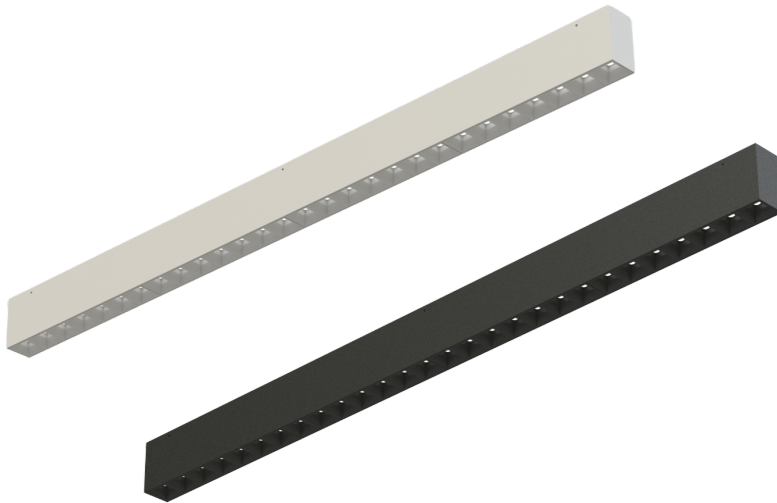

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.


We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L100** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 4 standard lengths in the range. Variety for all types of applications and spaces.

Our integrated driver system ensures the sleek square profile of the linear is maintained without the need for a remotely located power supply.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

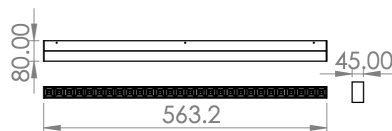


APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	8W	13W	8 - 13W
Lamp luminous flux*:	1505lm	2605lm	1505lm - 2605lm
Luminaire luminous flux*:	1234lm	2136lm	1234lm - 2136lm
Luminaire efficacy*:	154lm/W	164lm/W	154 - 164lm/W
Beam Angle:	65°, 90°, ASYM		65°, 90°, ASYM
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	563mm X 80mm X 45mm		563mm X 80mm X 45mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 1.1m Integrated Driver

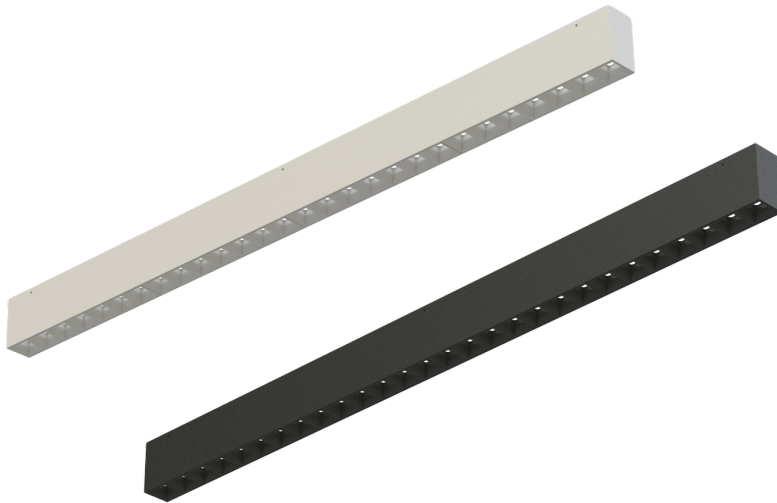

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.


We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L100** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 4 standard lengths in the range. Variety for all types of applications and spaces.

Our integrated driver system ensures the sleek square profile of the linear is maintained without the need for a remotely located power supply.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

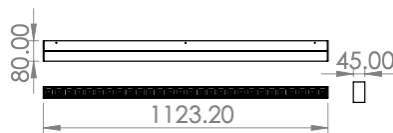


APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	15W	27W	15 - 27W
Lamp luminous flux*:	3010lm	5210lm	3010lm - 5210lm
Luminaire luminous flux*:	2468lm	4272lm	2468lm - 4272lm
Luminaire efficacy*:	165lm/W	158lm/W	158 - 165lm/W
Beam Angle:	65°, 90°, ASYM		65°, 90°, ASYM
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1123mm X 80mm X 45mm		1123mm X 80mm X 45mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 1.4m Integrated Driver

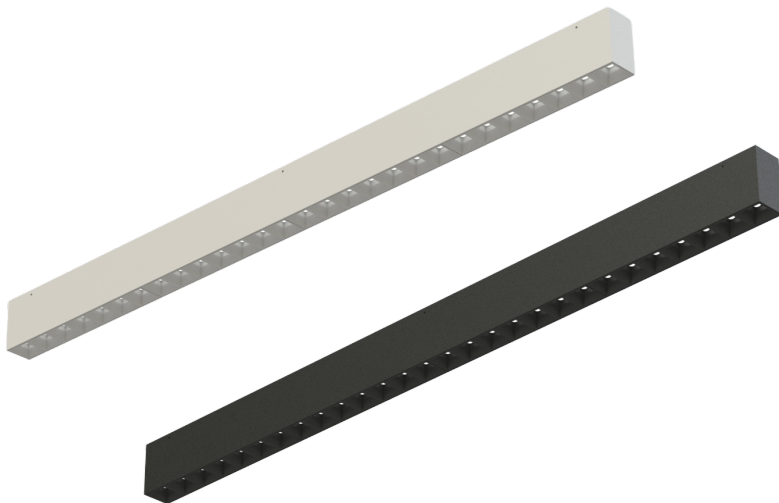

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.


We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L100** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 4 standard lengths in the range. Variety for all types of applications and spaces.

Our integrated driver system ensures the sleek square profile of the linear is maintained without the need for a remotely located power supply.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

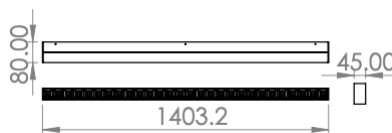


APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	19W	34W	19 - 34W
Lamp luminous flux*:	3760lm	6570lm	3760lm - 6570lm
Luminaire luminous flux*:	3083lm	5387lm	3083lm - 5387lm
Luminaire efficacy*:	162lm/W	158lm/W	158 - 162lm/W
Beam Angle:	65°, 90°, ASYM		65°, 90°, ASYM
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1403mm X 80mm X 45mm		1403mm X 80mm X 45mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 2.2m Integrated Driver

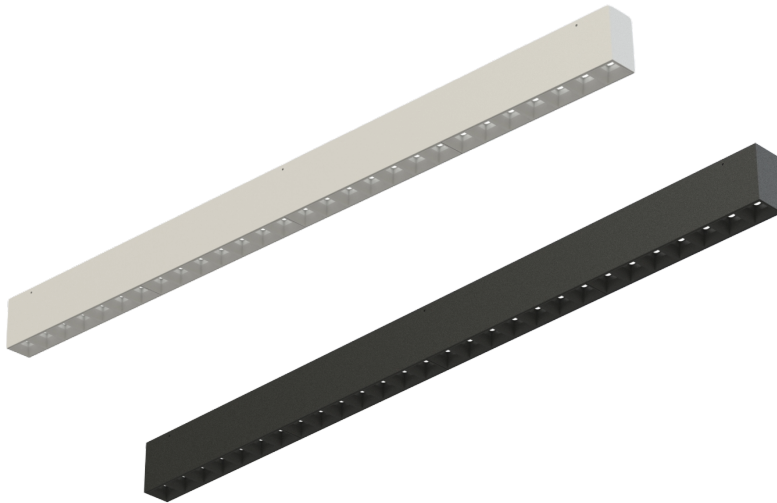

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.


We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L100** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 4 standard lengths in the range. Variety for all types of applications and spaces.

Our integrated driver system ensures the sleek square profile of the linear is maintained without the need for a remotely located power supply.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

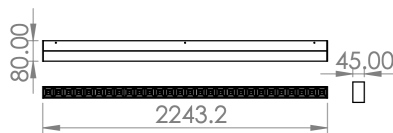

APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	30W	54W	30W- 54W
Lamp luminous flux*:	6020lm	10420lm	6020lm - 10420lm
Luminaire luminous flux*:	4936lm	8544lm	4936lm - 8544lm
Luminaire efficacy*:	165lm/W	158lm/W	158 - 165lm/W
Beam Angle:	65°, 90°, ASYM		65°, 90°, ASYM
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	2243mm X 80mm X 45mm		2243mm X 80mm X 45mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%