



High Bay

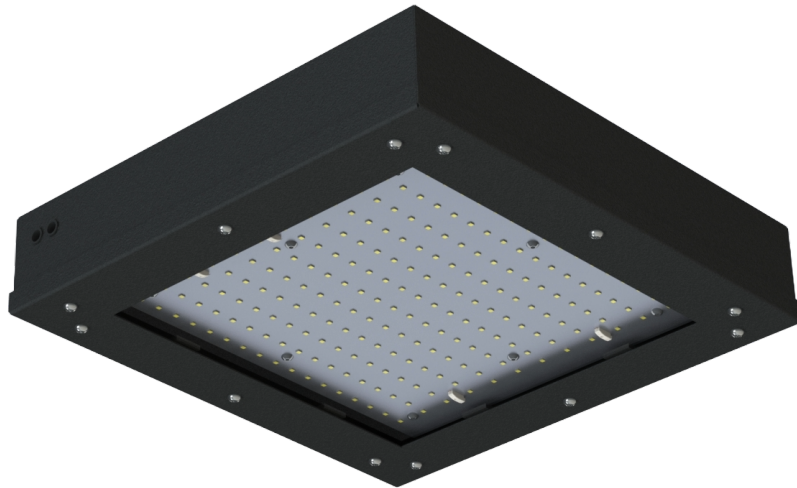

Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The H100 series designed for indoor environments with complete IP65 protection. Stainless Steel construction provides unrivalled exterior protection against the harshest of climates.

The H100 series high bay provides brilliant and consistent illumination to large volumes and expansive ceilings. Perfect for general illumination in various internal spaces.

Our **SELECT** range allows for numerous non standard customizations to any model within the range. Custom Power & Lumen outputs, Motion sensors, Building Management (BMS) integration, Daylight Harvesting capabilities, DALI control and Human-Centric adaptation.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

APPLICATIONS

Industrial, Security, Warehouse, Factories

	Standard	SELECT
Luminaire total power (W):	58 - 160W	Varies
Lamp luminous flux*:	8526 - 24104lm	Varies
Luminaire luminous flux*:	7674 - 21696lm	Varies
Luminaire efficacy*:	132 - 136lm/W	Varies
Beam Angle:	75°	75°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	4000K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	Stainless Steel	Stainless Steel
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%