

ULTRA Light

Company Profile & Catalogue Vol II

Who We Are

Ultra Light SA (PTY) LTD based in KwaZulu-Natal, South Africa, is a designer and manufacturer of luminaires and illumination systems. Our product offering focuses on the Wholesale, Industrial, Commercial, Retail, and Architectural sectors with our unique optional site-specific warranty.

Over and above our range of commercially available products, we provide bespoke luminaire and control system design and manufacturing, we offer OEM (Original Equipment Manufacturer) production. Through our solutions division, we offer turnkey solutions, including an industry-first luminaire performance guarantee combined with our in-house SLA (Service Level Agreement). With the rapid advances in technology, Ultra Light is able to remain abreast by our strategic partnerships with other industry leaders in their respective fields.

Our passion and creativity-driven enthusiasm for service excellence differentiates us from our competitors.

Being a customer-centric company, we endeavour to be your strategic and value-added partner along with developing and producing sustainable, energy efficient, world-class luminaires and illumination systems.

Why Work With Us

We design and manufacture from ground up. We own our IP and control our R&D thus introducing the latest technology to market.

Industry's first luminaire performance guarantee integrated into our Protect SLA.

We strive to offer you, our customer the best affordable price and product that fulfils your intended purpose.

We are transparent and ethical in our business conduct, as building our people and communities is one of our founding values.

We cover both ends of the market, from budget sensitive economical products to high-end premium systems and solutions.

We do not focus purely on providing illumination, but also on how illumination effects and benefits mankind, your business productivity and the environment.

Swift to integrate advances in technology, "Tunable white" (2014) Bluetooth, High efficacy over 155lm/W (2018) POE (2019).

Average ROI between 18-36months, Typical IRR above 25%, Optimal Cost of Ownership.

Creativity and passion is at the heart of our people, who are fulfilled by our customer satisfaction, as a result you can be assured that Ultra Light will bring you a constantly evolving range of products and systems that are infused with the latest innovations.

What Can We Offer

1. Illumination assessment and specification

There are so many options available out there, but what does all that data mean? This is likely to be a sizeable investment and needs to produce the results that you are expecting. Getting it wrong could lead to significant losses not to mention the safety hazards. Whether you are looking to embark on a project immediately, looking to write a specification or if you are in the process of doing a feasibility case study, we are at your service. We undertake a methodical process with measurable added value, including some of the following:

Site inspection and/or consultation with the client; proposed budgetary cost, cost of ownership, carbon emissions reduction and/or Project feasibility and ROI calculations; lighting simulations together with lighting layout and project finance.

We offer an objective approach because you are at the centre of why we do what we do.



3. Turnkey Solutions

Designing, installing, and maintaining a new lighting system can be complicated. With Ultra Light, you get peace of mind, as you deal with one person who takes responsibility for your lighting solution. One point of contact means you can focus on your core business while our team focuses on your project. This saves you both the time and hassle of trying to coordinate with all the various contractors involved. We manage the entire process - from planning, supply, installation, safety, project management to commissioning, and even maintenance. Even though we manufacture an extensive range of products ourselves, we will always choose the best product for you, even if it may be from another manufacturer. In this way, you get a state-of-the-art solution, delivered at a competitive price. Flexibility at its best... you are the client, you pick and choose which services you require. This means you can choose either a complete turnkey solution or pick only the services that suit your need. The choice is yours.



2. PROTECT SLA

We understand that everything that's important to you begins with light; from the start of your day to your business operations, therefore we understand the asset that good lighting means to you. Let us ensure the optimum functionality of your luminaires at all times with our PROTECT SLA. This service offers protection of your asset, your people, and your reputation - because what's important to you, is important to us.



4. Bespoke Solutions

Whether it is a luminaire or control system, everyone has a set of unique requirements and expectations.

Despite this, most luminaire manufacturers will try to fit you into a mould which they have created. You can imagine the extensive resources required in the development of luminaires or control systems and as a result, many manufacturers will not entertain a request for a Bespoke Solution unless the volumes are substantial. This approach may work in some cases, but your needs are unique and real.

You have requirements, but who holds the expertise to understand these requirements and transform them into something of value?

With a wealth of knowledge, Ultra Light's creative specialists, engineers, software architects, and international partners work in synergy, using reverse engineering methodologies to create luminaires, illumination systems, and control systems to produce the results you envision. Our team ensures that the Bespoke Solution functions in-sync with your business operations, which is easily accessible through a user-friendly interface.

We are passionate in our belief that luminaires and illumination systems are there for your betterment, and as such, should be designed around you, and not you around them.



5. OEM production

As many design houses, corporates, and wholesalers wish to focus their attention on designs and marketing, they may not have the infrastructure or experience to undertake full-scale manufacturing of luminaires or illumination systems. We are able to partner with you to fill this need.

With comprehensive facilities, our team is able to take your concepts and convert these into internationally compliant safe products, packaged under your brand, giving you the competitive edge and assurance of responsible manufacturing and high-quality products.

Ultra Light ensures conformance with the relevant IEC, EN, SANS, and RoHS standards. Our creative specialists provide you with CAD or IGS files, 3D renders and 3D models, full-scale prototypes, IES files, and ILAC-approved laboratory safety test reports.

ULTRA
Light

Our Brands

Our professional range of luminaires is becoming synonymous with quality and durability in the industrial, commercial, and architectural sectors. Designed and manufactured to International standards, we are proud to say that these luminaires come with a five-year/90000-hour warranty (LM80-B10 @ 85°). The luminaires housings carry a warranty of up to ten years with a mechanical impact protection rating up to IK10. Standard features in this range include dual surge protection up to 10kA, Flicker/Ripple free <4%, and independent circuits with a multi-drive system. All Itech luminaires are both repairable and upgradable, as an investment into this range ensures reduced maintenance costs after the luminaire exceeds its usable lifespan. Should you opt for our PROTECT SLA under this brand, your warranty will be converted to a performance warranty, whereby the pre-determined lux level requirement will be maintained over the warranty period. If you are looking for superior illumination, low maintenance, meaningful ROI and cost of ownership, then the Itech range of luminaires are sure to exceed your expectations.



itech



Ecolite products have been designed and manufactured in South Africa for a range of commercial, retail, and residential applications. These cost effective luminaire options carry a three-year/50000-hour (which ever comes first) warranty and are fully repairable. Built-in surge protection comes standard across the Ecolite range of products. With high lumen efficacy and proven reliability, the Ecolite range of products are sure to satisfy your illumination design requirements for these sectors



ULTRA
Light

Our Brands

Classic

The Emerald Classic range is specifically focused around our Interior Décor, Designers and Architectural clients. The products in this range are constantly evolving as the demand for the latest fashion trends emerge from the various corners of the globe. Working closely with you, our designers will customise or develop bespoke luminaires to suit your individual requirements. Allow us to integrate the science and art of lighting by enhancing your design elements whilst embodying the latest digitisation, transforming your creative aspiration into a design master piece.



Luxury

Our Emerald Luxury Collection has been exclusively reserved for our most prominent patrons. Be it a table lamp, chandelier, down light, or an architectural creation, luminaires in this range are discretely designed to meet your unique needs and/or ambiance of your respective establishments.

One of our leading creative specialists will meet with you to capture your inspirational thoughts and transform these into an illuminating masterpiece. Each luminaire is crafted utilising highly engineered materials and the world's finest lighting technologies, with some precious finishes that complement the elite brand name, such as 24k gold plating, pure silver, or fine crystal; whatever the case may be.

A personalised emblem specifically designed especially for you, is embedded into the main structure of the luminaire, highlighting its exclusivity.

A unique serial number is then given to each luminaire, identifying its manufacture history together with the individuals involved in creating this exceptional piece.

One of the company's directors personally inspects the individual pieces, and issues a certificate of authentication for this exclusive production run, guaranteeing that this collection satisfies your desire for distinctiveness.

Our Brands

Since 1964 Tru-Lite has been manufacturing luminaries for the domestic retail market. The brand was brought back to life to manufacture high quality, cost effective luminaires in South Africa for the commercial, retail, architectural and residential markets. It focuses its design around a market where a client does not want an LED luminaire but a luminaire where-by the client wants the ease of just replacing a bulb. The brand caters for all needs, whether it be a simple downlight to a complex pendant, Tru-lite does it.



Distributor of:



geraldjoseph

Distributor of:

Gerald Joseph is a provider of high-quality lighting products with a primary focus on affordability and functionality. We cater to chain stores, independent wholesale hardware stores, and wholesalers who value cost-effective lighting solutions without compromising on quality. Our diverse product range includes both locally manufactured and imported items to meet the varied needs of our customers. Gerald Joseph offers a comprehensive selection of non-decorative lighting products tailored to residential and commercial settings. Our product categories include Indoor Lighting, Outdoor Lighting, Bathroom Lighting, and Electrical Fittings, each with a 2-year warranty, as well as our specialised Coastal Range with a 10 year warranty.

ULTRA
Light

Product Preview


High Bay



Area Lighting



Low Bay

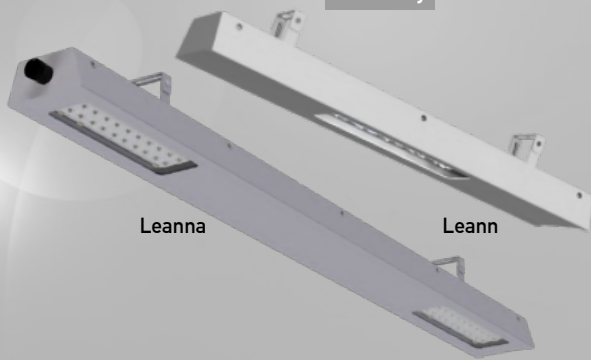


Stadium Lighting



Flood Light



Tunnel Lighting

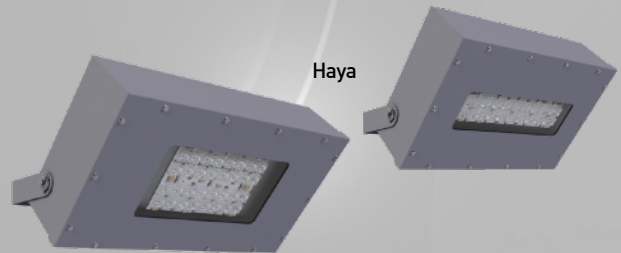

Hazardous Area Zone 1,2,20,21,22



Product Preview

Down Lights

High Bays

Flood Light

Wall Washers

Troffers

Vapour Proofs

Bulkheads

Retrofit Modules

Walk way

Linear Luminaires



Product Preview

Ceiling Luminaires



Picasso




Xavier High Dome



Xavier Flat



Xavier Dome



Xavier High Flat

Sphere Luminaires



Helen



Helen Lidl



Clara



Helena



Helena Trug



Helena Trug Post



Helena Post

Bulkheads



Illanga



Euro



Nura




Ellen



Alina



Alina Shade



Electra



Alora



Beacon



Ellie



Albert



Alina Grid



Alina Trio



Venetia

Electrical Fittings



Post Top



Flood Light



Bollards




Bollard



Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Designed for outdoor environments with complete IP54 protection. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates.

The B100 series bollards provide accent illumination in a number of external, walkways, gardens and other low-level applications. The concealed light source minimizes glare and creates sufficient projection on to the intended area, with the option of low, medium and high lumen outputs to suit your specific application



A simple circular form blends naturally into any modern landscape.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

APPLICATIONS

Commercial, Retail, Architectural, Facade, Walkway, General

	Standard		SELECT
Luminaire total power (W)	12W	17W	12 - 17W
Lamp luminous flux*	1790lm	2457lm	1790 - 2475lm
Luminaire luminous flux*	1253lm	1720lm	1253 - 1720lm
Luminaire efficacy*	105lm/W	101lm/W	101 - 105lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	Black		Optional
Dimensions:	900mm X Ø154mm		900mm X Ø154mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/-10%



Bollard



*Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.*


Designed for outdoor environments with complete IP54 protection. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates.

The B200 series bollards provide accent illumination in a number of external, walkways, gardens and other low-level applications. The concealed light source minimizes glare and creates sufficient projection on to the intended area, with the option of low, medium and high lumen outputs to suit your specific application

A simple rectangular form blends naturally into any modern landscape.

*Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.*

*All **ECOLITE** products come standard with a 3-year/50000 hour warranty.*



APPLICATIONS

Commercial, Retail, Architectural, Facade, Walkway, General

	Standard		SELECT
Luminaire total power (W)	12W	17W	12W - 17W
Lamp luminous flux*	2205lm	3105lm	2205 - 3105lm
Luminaire luminous flux*	1544lm	2174lm	1544 - 2174lm
Luminaire efficacy*	128lm/W	128lm/W	128lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	80		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	Black		Optional
Dimensions:	950mm X 223mm X 100mm		950mm X 223mm X 100mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/-10%

Bollard



Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.


Designed for outdoor environments with complete IP54 protection. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates.

The B200 series bollards provide accent illumination in a number of external, walkways, gardens and other low-level applications. The concealed light source minimizes glare and creates sufficient projection on to the intended area, with the option of low, medium and high lumen outputs to suit your specific application

A simple rectangular form blends naturally into any modern landscape.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.



APPLICATIONS

Commercial, Retail, Architectural, Facade, Walkway, General

	Standard		SELECT
Luminaire total power (W)	24W	34W	24W - 34W
Lamp luminous flux*	4410lm	6210lm	4410 - 6210lm
Luminaire luminous flux*	3084lm	4348lm	3084 - 4348lm
Luminaire efficacy*	128lm/W	128lm/W	128lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	80		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	Black		Optional
Dimensions:	950mm X 396mm X 100mm		950mm X 396mm X 100mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%



Bollard

*Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.*

Designed for outdoor environments with complete IP54 protection. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates.

The B200 series bollards provide accent illumination in a number of external, walkways, gardens and other low-level applications. The concealed light source minimizes glare and creates sufficient projection on to the intended area, with the option of low, medium and high lumen outputs to suit your specific application

A simple rectangular form blends naturally into any modern landscape.

*Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.*

*All **ECOLITE** products come standard with a 3-year/50000 hour warranty.*




APPLICATIONS

Commercial, Retail, Architectural, Facade, Walkway, General

	Standard		SELECT
Luminaire total power (W)	12W	17W	12W - 17W
Lamp luminous flux*	2205lm	3105lm	2205 - 3105lm
Luminaire luminous flux*	1544lm	2174lm	1544 - 2174lm
Luminaire efficacy*	128lm/W	128lm/W	128lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	80		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	Black		Optional
Dimensions:	950mm X 100mm X 100mm		950mm X 100mm X 100mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Bulkheads

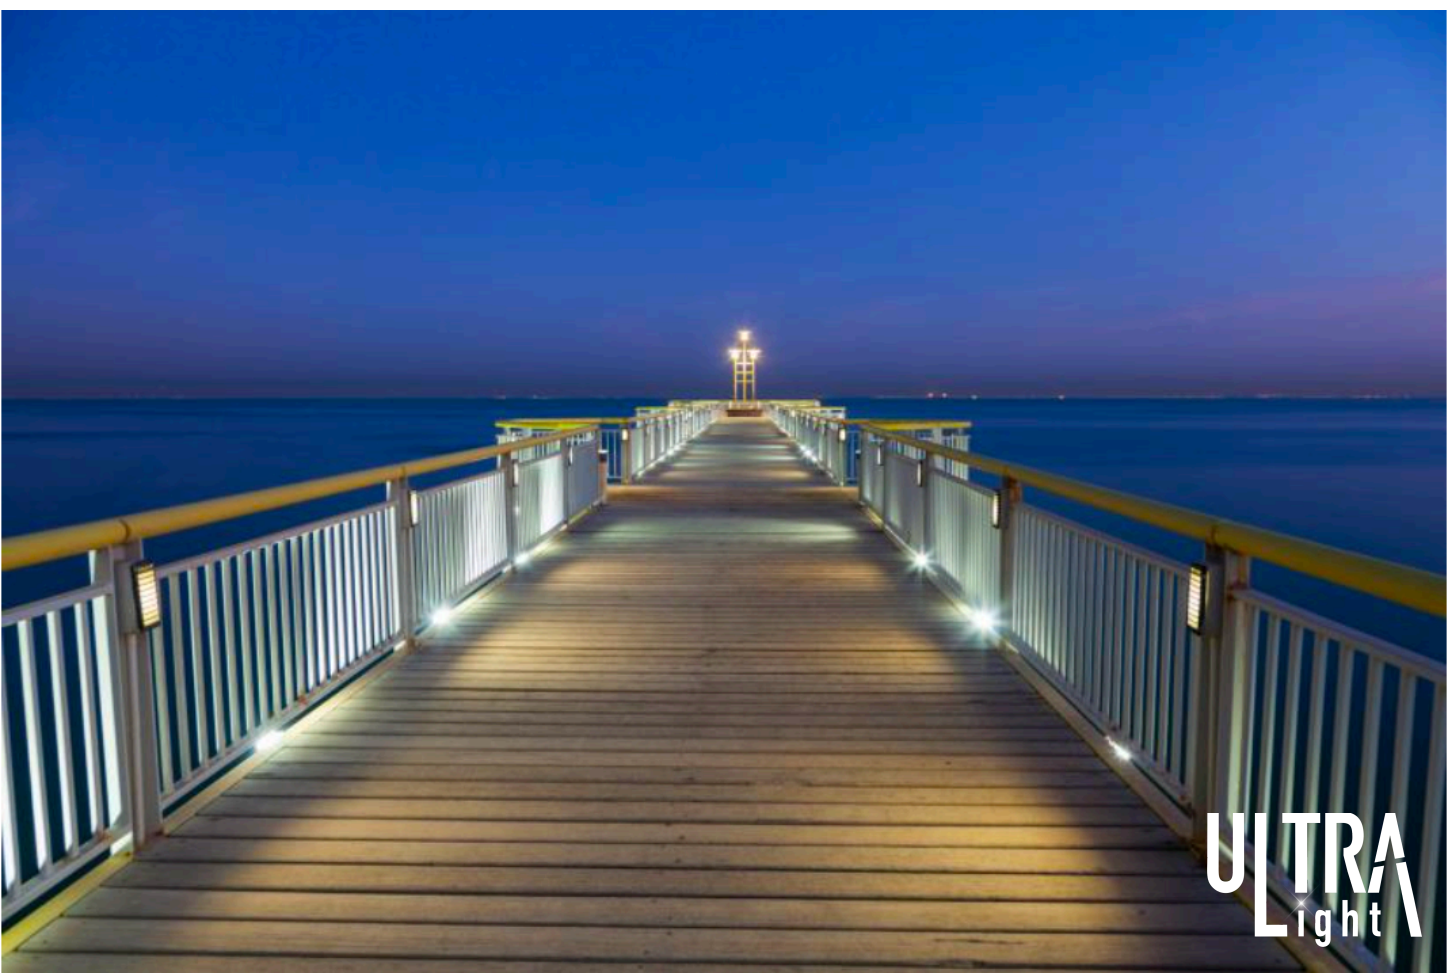

ULTRA
Light

Bulkhead




Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The BH100 series designed for outdoor environments with complete IP65 protection. Marine grade LM6 die-cast aluminium construction provides unrivalled exterior protection against the harshest of climates.

The BH100 series bulkhead provides brilliant and consistent illumination to walkways, corridors and is perfect for general illumination in various external spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

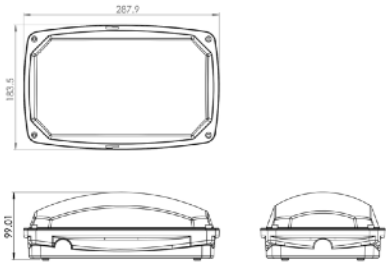

APPLICATIONS

Industrial, Security, Commercial, General

	Standard	SELECT
Luminaire total power (W):	12 - 23W	Varies
Lamp luminous flux*:	2100 - 3350lm	Varies
Luminaire luminous flux*:	1450 - 2350lm	Varies
Luminaire efficacy*:	102 - 121lm/W	Varies
Beam Angle:	120°	120°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	3000K, 4000K, 6500K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	LM6 Aluminium	LM6 Aluminium
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Bulkhead




Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The BH100 series designed for outdoor environments with complete IP65 protection. Marine grade LM6 die-cast aluminium construction provides unrivalled exterior protection against the harshest of climates.

The BH100 series bulkhead provides brilliant and consistent illumination to walkways, corridors and is perfect for general illumination in various external spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

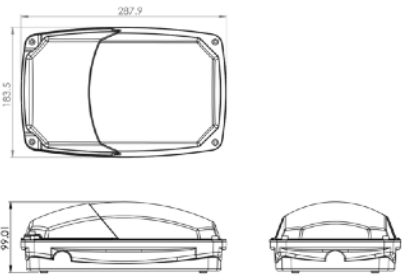

APPLICATIONS


Industrial, Security, Commercial, General

	Standard	SELECT
Luminaire total power (W):	12 - 23W	Varies
Lamp luminous flux*:	2100 - 3350lm	Varies
Luminaire luminous flux*:	1450 - 2350lm	Varies
Luminaire efficacy*:	102 - 121lm/W	Varies
Beam Angle:	120°	120°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	3000K, 4000K, 6500K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	LM6 Aluminium	LM6 Aluminium
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black,	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%



Bulkhead

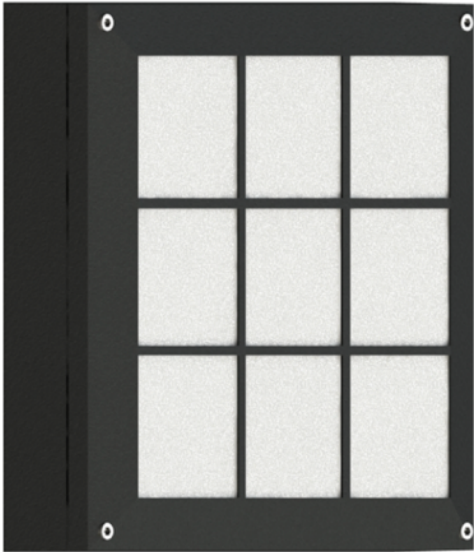


Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The BH100 series designed for outdoor environments with complete IP65 protection. Marine grade LM6 die-cast aluminium construction provides unrivalled exterior protection against the harshest of climates.

The BH100 series bulkhead provides brilliant and consistent illumination to walkways, corridors and is perfect for general illumination in various external spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

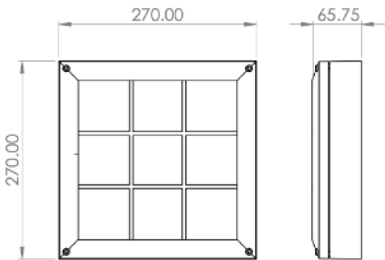

APPLICATIONS


Industrial, Security, Commercial, General

	Standard	SELECT
Luminaire total power (W):	12 - 23W	Varies
Lamp luminous flux*:	2100 - 3350lm	Varies
Luminaire luminous flux*:	1450 - 2350lm	Varies
Luminaire efficacy*:	102 - 121lm/W	Varies
Beam Angle:	120°	120°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	3000K, 4000K, 6500K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	LM6 Aluminium	LM6 Aluminium
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black, White, Silver	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%



Bulkhead

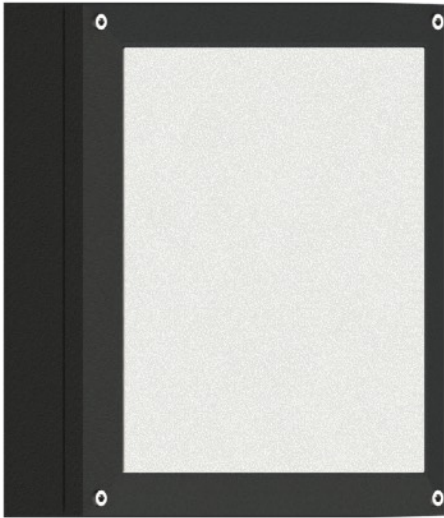


Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The BH100 series designed for outdoor environments with complete IP65 protection. Marine grade LM6 die-cast aluminium construction provides unrivalled exterior protection against the harshest of climates.

The BH100 series bulkhead provides brilliant and consistent illumination to walkways, corridors and is perfect for general illumination in various external spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

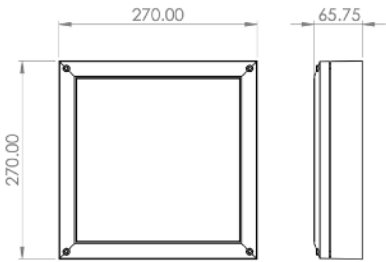


APPLICATIONS

Industrial, Security, Commercial, General

	Standard	SELECT
Luminaire total power (W):	12 - 23W	Varies
Lamp luminous flux*:	2100 - 3350lm	Varies
Luminaire luminous flux*:	1450 - 2350lm	Varies
Luminaire efficacy*:	102 - 121lm/W	Varies
Beam Angle:	120°	120°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	3000K, 4000K, 6500K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	LM6 Aluminium	LM6 Aluminium
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black, White, Silver	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Bulkhead

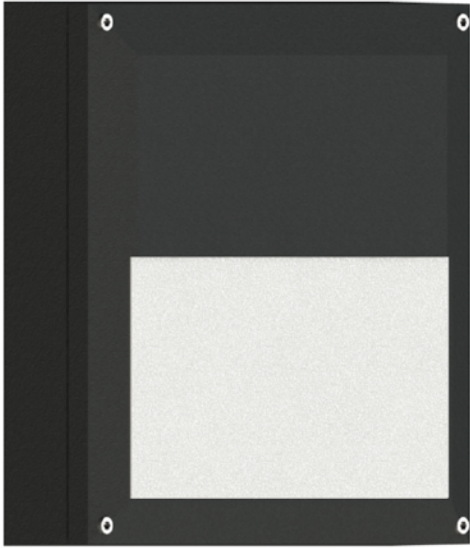


Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The BH100 series designed for outdoor environments with complete IP65 protection. Marine grade LM6 die-cast aluminium construction provides unrivalled exterior protection against the harshest of climates.

The BH100 series bulkhead provides brilliant and consistent illumination to walkways, corridors and is perfect for general illumination in various external spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

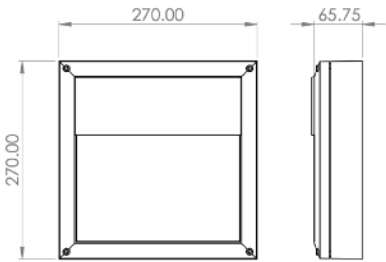

APPLICATIONS

Industrial, Security, Commercial, General

	Standard	SELECT
Luminaire total power (W):	12 - 23W	Varies
Lamp luminous flux*:	2100 - 3350lm	Varies
Luminaire luminous flux*:	1450 - 2350lm	Varies
Luminaire efficacy*:	102 - 121lm/W	Varies
Beam Angle:	120°	120°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	3000K, 4000K, 6500K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	LM6 Aluminium	LM6 Aluminium
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black, White, Silver	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%



Bulkhead




Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The BH200 series designed for outdoor environments with complete IP65 protection. Marine grade LM6 die-cast aluminium construction provides unrivalled exterior protection against the harshest of climates.

The BH200 series bulkhead provides brilliant and consistent illumination to walkways, corridors and is perfect for general illumination in various external spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

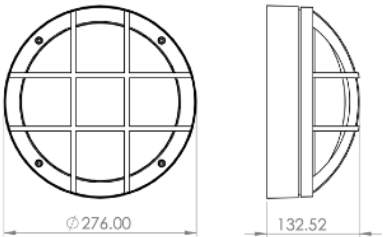

APPLICATIONS

Industrial, Security, Commercial, General

	Standard	SELECT
Luminaire total power (W):	12 - 23W	Varies
Lamp luminous flux*:	2100 - 3350lm	Varies
Luminaire luminous flux*:	1450 - 2350lm	Varies
Luminaire efficacy*:	102 - 121lm/W	Varies
Beam Angle:	120°	120°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	3000K, 4000K, 6500K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	LM6 Aluminium	LM6 Aluminium
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black, White, Grey	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%





Bulkhead




Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The BH200 series designed for outdoor environments with complete IP65 protection. Marine grade LM6 die-cast aluminium construction provides unrivalled exterior protection against the harshest of climates.

The BH200 series bulkhead provides brilliant and consistent illumination to walkways, corridors and is perfect for general illumination in various external spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

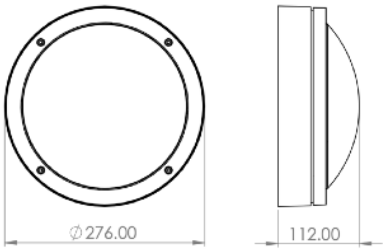

APPLICATIONS

Industrial, Security, Commercial, General

	Standard	SELECT
Luminaire total power (W):	12 - 23W	Varies
Lamp luminous flux*:	2100 - 3350lm	Varies
Luminaire luminous flux*:	1450 - 2350lm	Varies
Luminaire efficacy*:	102 - 121lm/W	Varies
Beam Angle:	120°	120°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	3000K, 4000K, 6500K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	LM6 Aluminium	LM6 Aluminium
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black, White, Grey	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%





Bulkhead




Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The BH200 series designed for outdoor environments with complete IP65 protection. Marine grade LM6 die-cast aluminium construction provides unrivalled exterior protection against the harshest of climates.

The BH200 series bulkhead provides brilliant and consistent illumination to walkways, corridors and is perfect for general illumination in various external spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

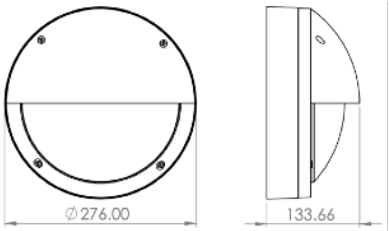

APPLICATIONS

Industrial, Security, Commercial, General

	Standard	SELECT
Luminaire total power (W):	12 - 23W	Varies
Lamp luminous flux*:	2100 - 3350lm	Varies
Luminaire luminous flux*:	1450 - 2350lm	Varies
Luminaire efficacy*:	102 - 121lm/W	Varies
Beam Angle:	120°	120°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	3000K, 4000K, 6500K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	LM6 Aluminium	LM6 Aluminium
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black, White, Silver	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%





Bulkhead





Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The BH200 series designed for outdoor environments with complete IP65 protection. Marine grade LM6 die-cast aluminium construction provides unrivalled exterior protection against the harshest of climates.

The BH200 series bulkhead provides brilliant and consistent illumination to walkways, corridors and is perfect for general illumination in various external spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

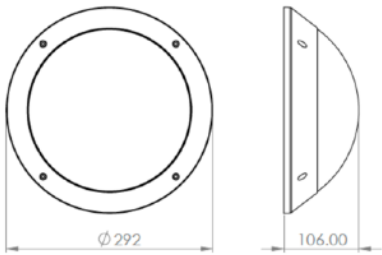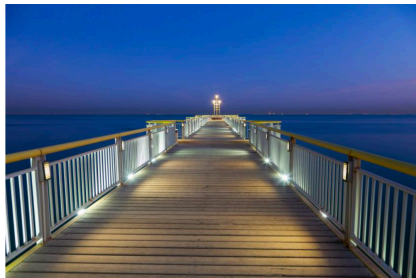

APPLICATIONS

Industrial, Security, Commercial, General

	Standard	SELECT
Luminaire total power (W):	12 - 23W	Varies
Lamp luminous flux*:	2100 - 3350lm	Varies
Luminaire luminous flux*:	1450 - 2350lm	Varies
Luminaire efficacy*:	102 - 121lm/W	Varies
Beam Angle:	120°	120°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	3000K, 4000K, 6500K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	LM6 Aluminium	LM6 Aluminium
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black, White, Silver	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Downlights



Recessed Square Downlight




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Architectural and Retail sectors alike.

With a functional design and uniform appearance, our D300 series are perfect for commercial environments with conventional ceilings such as offices, hospitals, large areas, retail, restaurants and corridors..

Our D300 series offers superior operating lifespan and low maintenance requirements

Apart from our standard White, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

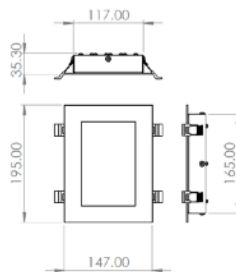

APPLICATIONS

Factory, General Area, Parking Garages

	Standard		SELECT
Luminaire total power (W)	13W	16W	13-16W
Lamp luminous flux*:	2476lm	2940lm	2476 - 2940lm
Luminaire luminous flux*:	1733lm	2058lm	1733 - 2058lm
Luminaire efficacy*:	133lm/W	129lm/W	129 - 133lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	80		70 - 97
Body Construction:	Mildsteel		Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White		Optional
Dimensions:	195mm X 147mm X 35mm		195mm X 147mm X 35mm
Dimming:	No		Optional
Battery Back-Up:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Recessed Square Downlight




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Architectural and Retail sectors alike.

With a functional design and uniform appearance, our D300 series are perfect for commercial environments with conventional ceilings such as offices, hospitals, large areas, retail, restaurants, hotels, residential and corridors.

Our D300 series offers superior operating lifespan and low maintenance requirements

Apart from our standard White and Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

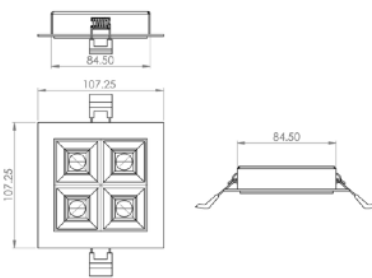


APPLICATIONS

Commercial, Retail, Office, General, Area, Hotel, Residential

	Standard		SELECT
Luminaire total power (W)	2W	4W	2 - 8W
Lamp luminous flux*:	430lm	745lm	430 - 1490lm
Luminaire luminous flux*:	352lm	611lm	325 - 1222lm
Luminaire efficacy*:	176lm/W	153lm/W	152 - 176lm/W
Beam Angle:	90°		65° Or 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Mildsteel		Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	107mm X 107mm X 23mm		107mm X 107mm X 23mm
Dimming:	No		Optional
Battery Back-Up:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Flush Recessed Square Downlight

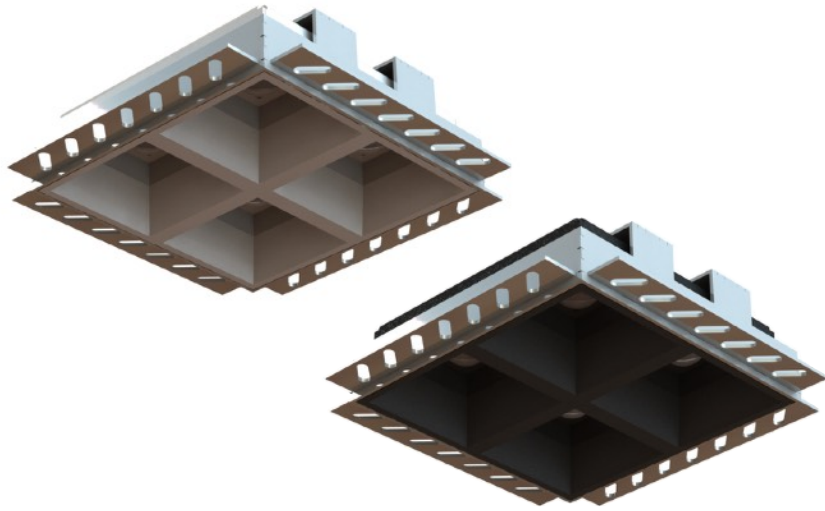


Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Architectural and Retail sectors alike.

With a functional design and uniform appearance, our D300 series are perfect for commercial environments with conventional ceilings such as offices, hospitals, large areas, retail, restaurants, hotels, residential and corridors.

Our D300 series offers superior operating lifespan and low maintenance requirements

Apart from our standard White and Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

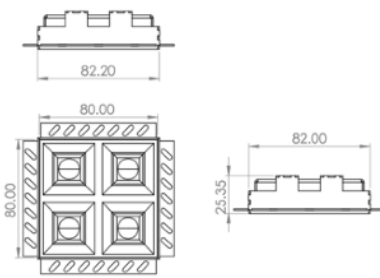

APPLICATIONS

Commercial, Retail, Office, General, Area, Hotel, Residential

	Standard		SELECT
Luminaire total power (W)	2W	4W	2 - 8W
Lamp luminous flux*:	430lm	745lm	430 - 1490lm
Luminaire luminous flux*:	352lm	611lm	325 - 1222lm
Luminaire efficacy*:	176lm/W	153lm/W	152 - 176lm/W
Beam Angle:	90°		65° Or 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Mildsteel		Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	107mm X 107mm X 23mm		107mm X 107mm X 23mm
Dimming:	No		Optional
Battery Back-Up:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Recessed Square Downlight




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Architectural and Retail sectors alike.

With a functional design and uniform appearance, our D300 series are perfect for commercial environments with conventional ceilings such as offices, hospitals, large areas, retail, restaurants, hotels, residential and corridors.

Our D300 series offers superior operating lifespan and low maintenance requirements

Apart from our standard White and Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

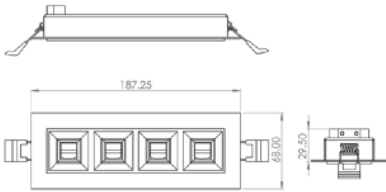

APPLICATIONS

Commercial, Retail, Office, General, Area, Hotel, Residential

	Standard		SELECT
Luminaire total power (W)	2W	4W	2 - 8W
Lamp luminous flux*	430lm	745lm	430 - 1490lm
Luminaire luminous flux*	352lm	611lm	325 - 1222lm
Luminaire efficacy*	176lm/W	153lm/W	152 - 176lm/W
Beam Angle:	90°		65° Or 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Mildsteel		Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	187mm X 68mm X 30mm		187mm X 68mm X 30mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Recessed Square Downlight




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Architectural and Retail sectors alike.

With a functional design and uniform appearance, our D300 series are perfect for commercial environments with conventional ceilings such as offices, hospitals, large areas, retail, restaurants, hotels, residential and corridors.

Our D300 series offers superior operating lifespan and low maintenance requirements

Apart from our standard White and Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

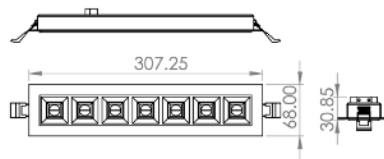

APPLICATIONS

Commercial, Retail, Office, General, Area, Hotel, Residential

	Standard		SELECT
Luminaire total power (W)	4W	7W	2 - 8W
Lamp luminous flux*	750lm	1300lm	750lm - 1300lm
Luminaire luminous flux*	615lm	1066lm	615lm - 1066lm
Luminaire efficacy*	154lm/W	133lm/W	133 - 154lm/W
Beam Angle:	65°, 90°, ASYM		65°, 90°, ASYM
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Mildsteel		Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	307mm X 68mm X 31mm		307mm X 68mm X 31mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface Square Downlight




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Architectural and Retail sectors alike.

With a functional design and uniform appearance, our D400 series are perfect for commercial environments with conventional ceilings such as offices, hospitals, large areas, retail, restaurants and corridors..

Our D400 series offers superior operating lifespan and low maintenance requirements

Apart from our standard White, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

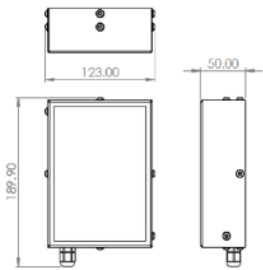


APPLICATIONS

Factory, General Area, Parking Garages

	Standard		SELECT
Luminaire total power (W)	13W	16W	13-16W
Lamp luminous flux*:	2476lm	2940lm	2476 - 2940lm
Luminaire luminous flux*:	1733lm	2058lm	1733 - 2058lm
Luminaire efficacy*:	133lm/W	129lm/W	129 - 133lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	80		70 - 97
Body Construction:	Mildsteel		Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White		Optional
Dimensions:	195mm X 147mm X 35mm		195mm X 147mm X 35mm
Dimming:	No		Optional
Battery Back-Up:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface Square Downlight

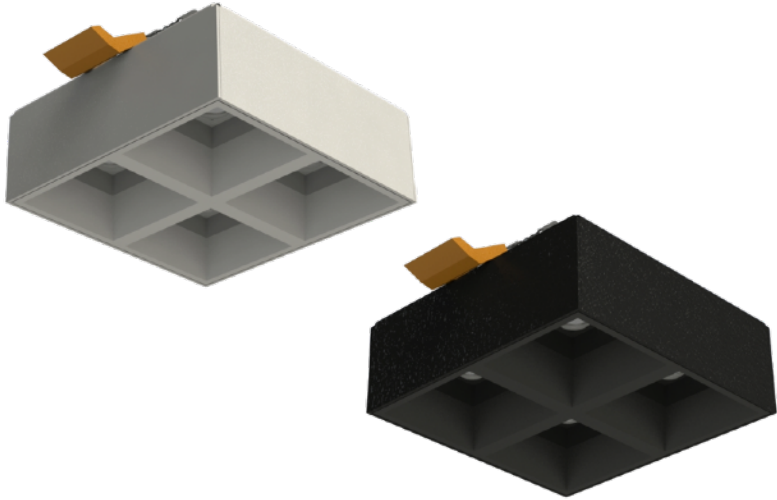


Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Architectural and Retail sectors alike.

With a functional design and uniform appearance, our D300 series are perfect for commercial environments with conventional ceilings such as offices, hospitals, large areas, retail, restaurants, hotels, residential and corridors.

Our D300 series offers superior operating lifespan and low maintenance requirements

Apart from our standard White and Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

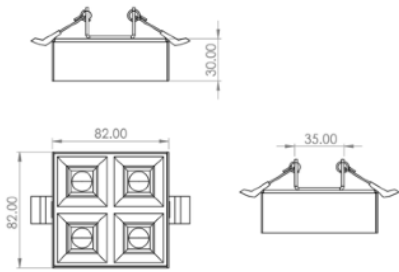


APPLICATIONS

Commercial, Retail, Office, General, Area, Hotel, Residential

	Standard		SELECT
Luminaire total power (W)	2W	4W	2 - 8W
Lamp luminous flux*:	430lm	745lm	430 - 1490lm
Luminaire luminous flux*:	352lm	611lm	325 - 1222lm
Luminaire efficacy*:	176lm/W	153lm/W	152 - 176lm/W
Beam Angle:	90°		65° Or 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Mildsteel		Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	107mm X 107mm X 23mm		107mm X 107mm X 23mm
Dimming:	No		Optional
Battery Back-Up:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface Square Downlight

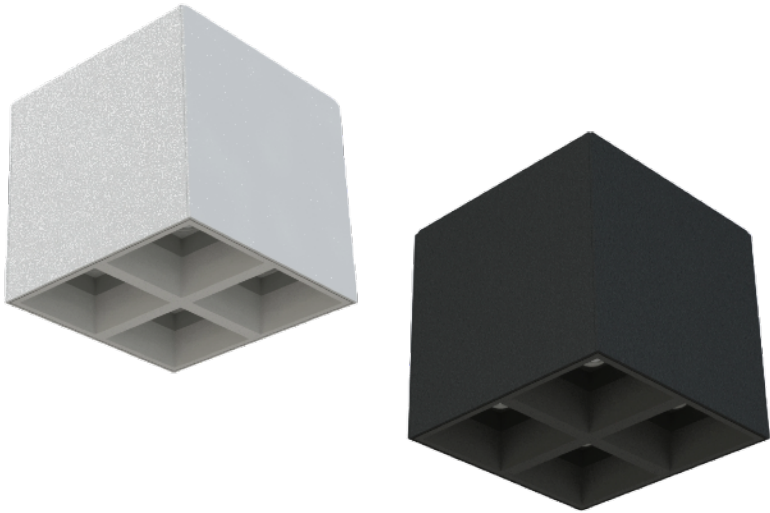


Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Architectural and Retail sectors alike.

With a functional design and uniform appearance, our D300 series are perfect for commercial environments with conventional ceilings such as offices, hospitals, large areas, retail, restaurants, hotels, residential and corridors.

Our D300 series offers superior operating lifespan and low maintenance requirements

Apart from our standard White and Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.



APPLICATIONS

Commercial, Retail, Office, General, Area, Hotel, Residential

	Standard		Select
Luminaire total power (W)	2W	4W	2 - 8W
Lamp luminous flux*:	430lm	745lm	430 - 1490lm
Luminaire luminous flux*:	352lm	611lm	325 - 1222lm
Luminaire efficacy*:	176lm/W	153lm/W	152 - 176lm/W
Beam Angle:	90°		65° Or 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Mildsteel		Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	107mm X 107mm X 23mm		107mm X 107mm X 23mm
Dimming:	No		Optional
Battery Back-Up:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface Square Downlight




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Architectural and Retail sectors alike.

With a functional design and uniform appearance, our D400 series are perfect for commercial environments with conventional ceilings such as offices, hospitals, large areas, retail, restaurants, hotels, residential and corridors.

Our D400 series offers superior operating lifespan and low maintenance requirements

Apart from our standard White and Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

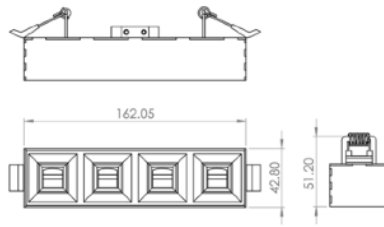

APPLICATIONS

Commercial, Retail, Office, General, Area, Hotel, Residential

	Standard		SELECT
Luminaire total power (W)	2W	4W	2 - 8W
Lamp luminous flux*:	430lm	745lm	430 - 1490lm
Luminaire luminous flux*:	352lm	611lm	325 - 1222lm
Luminaire efficacy*:	176lm/W	153lm/W	152 - 176lm/W
Beam Angle:	90°		65° Or 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Mildsteel		Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	162mm X 51mm X 43mm		162mm X 51mm X 43mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface Square Downlight




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Architectural and Retail sectors alike.

With a functional design and uniform appearance, our D400 series are perfect for commercial environments with conventional ceilings such as offices, hospitals, large areas, retail, restaurants, hotels, residential and corridors.

Our D400 series offers superior operating lifespan and low maintenance requirements

Apart from our standard White and Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

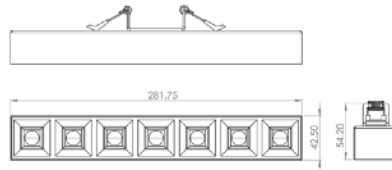

APPLICATIONS

Commercial, Retail, Office, General, Area, Hotel, Residential

	Standard		SELECT
Luminaire total power (W)	4W	8W	2 - 8W
Lamp luminous flux*:	750lm	1300lm	750lm - 1300lm
Luminaire luminous flux*:	615lm	1066lm	615lm - 1066lm
Luminaire efficacy*:	154lm/W	133lm/W	133 - 154lm/W
Beam Angle:	65°, 90°, ASYM		65°, 90°, ASYM
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Mildsteel		Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	282mm X 54mm X 43mm		282mm X 54mm X 43mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Floodlights



ULTRA
Light

Kiran

Floodlight



The KIRAN family is part of our **ITECH** range of products, that have been designed and manufactured in South Africa for a variety of industrial and commercial applications.


We understand the value of uninterrupted operations to a business. As such, standard features in this range include: Dual Surge Protection up to 10kA, Flicker/Ripple Free <5% and independent circuitry with a Multi-Driver system.. This range is specifically designed for high output environments, and all luminaires carry a standard five-year or 90000-hour (whichever comes first) warranty. In addition to this, all luminaire housings have a Mechanical Impact protection rating up to IK10 and carry a ten-year warranty. All **ITECH** luminaires are both fully repairable and upgradeable.

KIRAN was designed specifically for External Heavy Industrial environments. The housing undergoes multi-stage electrolytic coating which provides superior anti-corrosive and strengthening properties.

A variety of adjustable mounting options are available, and our in - house design team can easily cater to any specific mounting needs.

Our **SELECT** range allows for numerous non-standard customizations to any model within the range. Custom Power & Lumen outputs, Motion sensors, Building Management (BMS) integration, Daylight Harvesting capabilities, DALI control and Human-Centric adaptation. Unique additions such as Infrared, seamlessly assist CCTV systems in low-light conditions, from a variety of vantage points.

Quality and Durability are at the heart of the **ITECH** range, encompassing superior illumination, low maintenance and significant ROI.

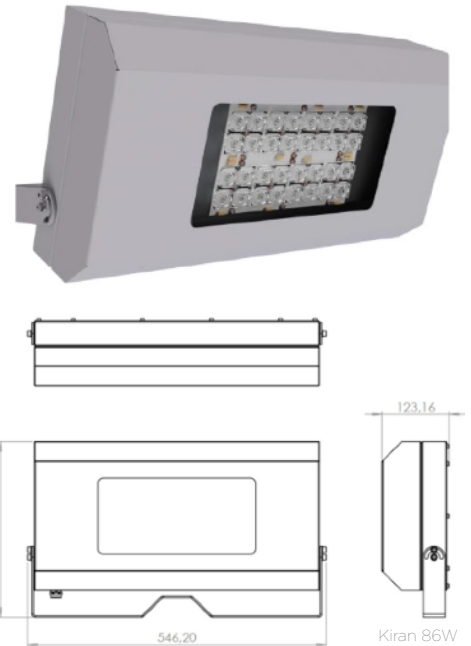

APPLICATIONS

Industrial, Outdoor Environments, Harbour/Port Lighting, Humid Industrial Environments

	Standard	SELECT
Luminaire total power (W):	34 - 172W	Varies
Lamp luminous flux*:	5581 - 25728lm	Varies
Luminaire luminous flux*:	4861 - 23672lm	Varies
Luminaire efficacy*:	140 - 146lm/W	Varies
Beam Angle:	50°, 65°, 100°	Varies
Rated useful life*:	L80 B10 90000 hours	L80 B10 90000 hours
Correlated colour temperature*:	4000K	Varies
Colour Rendering Index min:	70	70 - 90
Body Construction:	Stainless Steel	Stainless Steel
Finish:	Stage 1 : E-Coated, Stage 2 : Powder Coated	Stage 1 : E-Coated, Stage 2 : Powder Coated
Body Colour:	Hammered Grey	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 3.5kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 3.5kV
Flicker Free control system (No Stroboscopic effect):	Yes < 4%	Yes < 4%
Additional surge protection:	Nominal surge current: 5- hit, 5KA: max: 1-hit: 10kA	Nominal surge current: 5- hit, 5KA: max: 1-hit: 10kA
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Email: sales@ultralightsa.co.za Website: www.ultralightsa.co.za Warranty is subject to our warranty policy, a copy of which is available on request

itech

©Copyright 2024 Ultra Light SA PTY LTD This article may not be reproduced in part or whole or transmitted in any form or by any means, electronic or mechanical – including photocopying, recording, or by any information storage and retrieval system – without permission from Ultra Light SA PTY LTD

Floodlight




Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The F100 series designed for outdoor environments with complete IP65 protection. Stainless Steel construction provides unrivalled exterior protection against the harshest of climates.

The F100 series floodlight provides brilliant and consistent illumination to large footprint areas. Perfect for general illumination in various external spaces.

Our **SELECT** range allows for numerous non standard customizations to any model within the range. Custom Power & Lumen outputs, Motion sensors, Building Management (BMS) integration, Daylight Harvesting capabilities, DALI control and Human-Centric adaptation.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty



APPLICATIONS

Industrial, Security, Warehouse, Factories

	Standard	SELECT
Luminaire total power (W):	58 - 160W	Varies
Lamp luminous flux*:	8526 - 24104lm	Varies
Luminaire luminous flux*:	7674 - 21696lm	Varies
Luminaire efficacy*:	132 - 136lm/W	Varies
Beam Angle:	75°	75°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	4000K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	Stainless Steel	Stainless Steel
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

High & Low Bays



ULTRA
Light

The KIRA family is part of our **ITECH** range of products, that have been designed and manufactured in South Africa for a variety of industrial and commercial applications.

Our **ITECH** range is specifically designed for high output environments, and all luminaires carry a standard five-year or 90000- hour (whichever comes first) warranty. In addition to this, all luminaire housings have a Mechanical Impact protection rating up to IK10 and carry a ten-year warranty.



Superior lighting relies on consistent clean power supply, and too often luminaires are not adequately equipped to protect your investment. Hence our standard features in this range include: Dual Surge Protection up to 10kA, Flicker/Ripple Free <5% and independent circuitry with a Multi-Driver system. We understand that lighting is an imperative asset to your business operations.

All **ITECH** luminaires are both fully repairable and upgradeable. We also provide a variety of mounting brackets to suit practical individual requirements: Standard P2000, Suspension Cable, Surface Mount.

Our **SELECT** range allows for numerous non-standard customizations to any model within the range. Custom Power & Lumen outputs, Motion sensors, Building Management (BMS) integration, Daylight Harvesting capabilities, DALI control and Human-Centric adaptation.

Our superior Hybrid Lens technology allows us to project multiple blended beam angles within a single luminaire. Providing consistent illuminance and spreads, whilst reducing harsh glare and shadowing.

Quality and Durability are at the heart of the **ITECH** range, encompassing superior illumination, low maintenance and significant ROI.

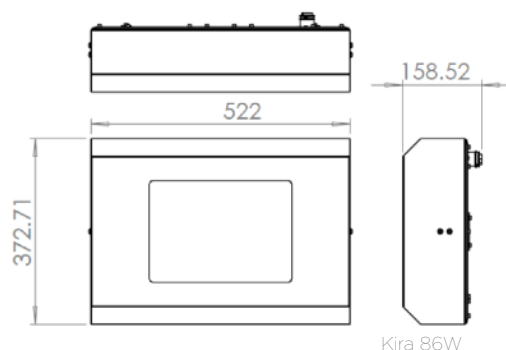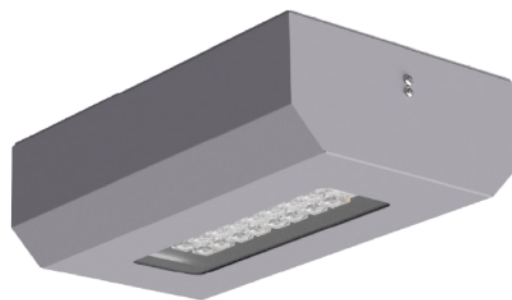

APPLICATIONS



Industrial, Ceiling Height >12m, Tiered Racking & Shelving, Large Volume Warehousing

	Standard	SELECT
Luminaire total power (W):	34 - 172W	Varies
Lamp luminous flux*:	5581 - 25728lm	Varies
Luminaire luminous flux*:	4861 - 23672lm	Varies
Luminaire efficacy*:	140 - 146lm/W	Varies
Beam Angle:	50°, 65°, 100°	Varies
Rated useful life*:	L80 B10 90000 hours	L80 B10 90000 hours
Correlated colour temperature*:	4000K	Varies
Colour Rendering Index min:	70	70 - 90
Body Construction:	Stainless Steel	Stainless Steel
Finish:	Stage 1 : E-Coated, Stage 2 : Powder Coated	Stage 1 : E-Coated, Stage 2 : Powder Coated
Body Colour:	Hammered Grey	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 3.5kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 3.5kV
Flicker Free control system (No Stroboscopic effect):	Yes < 4%	Yes < 4%
Additional surge protection:	Nominal surge current: 5- hit, 5KA: max: 1-hit: 10kA	Nominal surge current: 5- hit, 5KA: max: 1-hit: 10kA
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Email: sales@ultralightsa.co.za Website: www.ultralightsa.co.za Warranty is subject to our warranty policy, a copy of which is available on request

High Bay

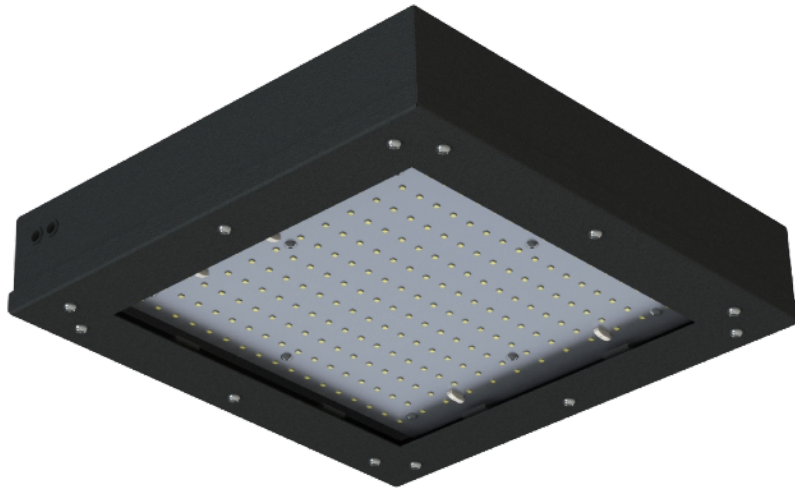

Our **ECOLITE** range has a broad appeal and a variety of industrial applications.

The H100 series designed for indoor environments with complete IP65 protection. Stainless Steel construction provides unrivalled exterior protection against the harshest of climates.

The H100 series high bay provides brilliant and consistent illumination to large volumes and expansive ceilings. Perfect for general illumination in various internal spaces.

Our **SELECT** range allows for numerous non standard customizations to any model within the range. Custom Power & Lumen outputs, Motion sensors, Building Management (BMS) integration, Daylight Harvesting capabilities, DALI control and Human-Centric adaptation.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

APPLICATIONS

Industrial, Security, Warehouse, Factories

	Standard	SELECT
Luminaire total power (W):	58 - 160W	Varies
Lamp luminous flux*:	8526 - 24104lm	Varies
Luminaire luminous flux*:	7674 - 21696lm	Varies
Luminaire efficacy*:	132 - 136lm/W	Varies
Beam Angle:	75°	75°
Rated useful life*:	L70 B50 50000 hours	L70 B50 50000 hours
Correlated colour temperature*:	4000K	Varies
Colour Rendering Index min:	80	70 - 90
Body Construction:	Stainless Steel	Stainless Steel
Finish:	Powder Coated	Powder Coated
Body Colour:	Hammered Black	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Flicker free control system (No Stroboscopic effect):	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

The LEANNA family is part of our **ITECH** range of products, that have been designed and manufactured in South Africa for a variety of industrial and commercial applications.



Our **ITECH** range is specifically designed for high output environments, and all luminaires carry a standard five-year or 90000-hour (whichever comes first) warranty. In addition to this, all luminaire housings have a Mechanical Impact protection rating up to IK10 and carry a ten-year warranty. Superior lighting relies on consistent clean power supply, and too often luminaires are not adequately equipped to protect your investment. Hence our standard features in this range include: Dual Surge Protection up to 10kA, Flicker/Ripple Free <5% and independent circuitry with a Multi-Driver system.

All our luminaires use single-bin LED components to provide greater uniformity and accurate colour rendering. Not all LED's are efficient, which is why the LEANNA uses premium components that deliver greater illuminance at reduced energy consumptions.

LEANNA incorporates internal 220V daisy-chain looping, allowing multiple luminaires to be powered via a single point of supply, reducing installation and maintenance times by 30%. Quick fit Stucchi couplers are standard with all models. We also provide a variety of mounting brackets to suit practical individual requirements: Standard P2000, Suspension Cable, Surface Mounted.

Our **SELECT** range allows for numerous non-standard customizations to any model within the range. Custom Power & Lumen outputs, Motion sensors, Building Management (BMS) integration, Daylight Harvesting capabilities, DALI control and Human-Centric adaptation.

Quality and Durability are at the heart of the **ITECH** range, encompassing superior illumination, low maintenance and significant ROI.

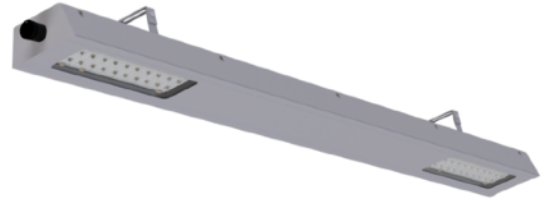

APPLICATIONS

Ceiling Height >5m, FMCG Manufacturing Environments, Parking Garages

	Standard	SELECT
Luminaire total power (W):	30 - 50W	Varies
Lamp luminous flux*:	5035 - 8081lm	Varies
Luminaire luminous flux*:	4632 - 7892lm	Varies
Luminaire efficacy*:	154 - 157lm/W	Varies
Beam Angle:	148°	Varies
Rated useful life*:	L80 B10 90000 hours	L80 B10 90000 hours
Correlated colour temperature*:	4000K	Varies
Colour Rendering Index min:	70	70 - 90
Body Construction:	Stainless Steel	Stainless Steel
Finish:	Stage 1 : E-Coated, Stage 2 : Powder Coated	Stage 1 : E-Coated, Stage 2 : Powder Coated
Body Colour:	Hammered Grey	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 3.5kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 3.5kV
Flicker Free control system (No Stroboscopic effect):	Yes < 4%	Yes < 4%
Additional surge protection:	Nominal surge current: 5- hit, 5KA: max: 1-hit: 10kA	Nominal surge current: 5- hit, 5KA: max: 1-hit: 10kA
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ T₈₅°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%


Email: sales@ultralightsa.co.za Website: www.ultralightsa.co.za Warranty is subject to our warranty policy, a copy of which is available on request

©Copyright 2024 Ultra Light SA PTY LTD This article may not be reproduced in part or whole or transmitted in any form or by any means, electronic or mechanical – including photocopying, recording, or by any information storage and retrieval system – without permission from Ultra Light SA PTY LTD

Linears



Surface/Suspended Linear - 0.6m Integrated Driver

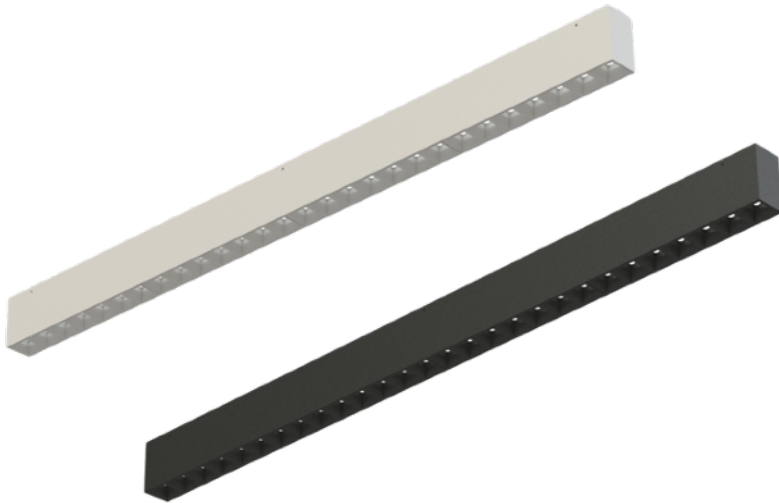

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.


We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L100** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 4 standard lengths in the range. Variety for all types of applications and spaces.

Our integrated driver system ensures the sleek square profile of the linear is maintained without the need for a remotely located power supply.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty

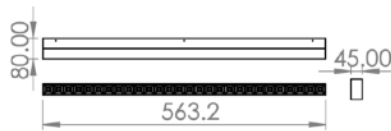


APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	8W	13W	8 - 13W
Lamp luminous flux*:	1505lm	2605lm	1505lm - 2605lm
Luminaire luminous flux*:	1234lm	2136lm	1234lm - 2136lm
Luminaire efficacy*:	154lm/W	164lm/W	154 - 164lm/W
Beam Angle:	65°, 90°, ASYM		65°, 90°, ASYM
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	563mm X 80mm X 45mm		563mm X 80mm X 45mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 1.1m Integrated Driver

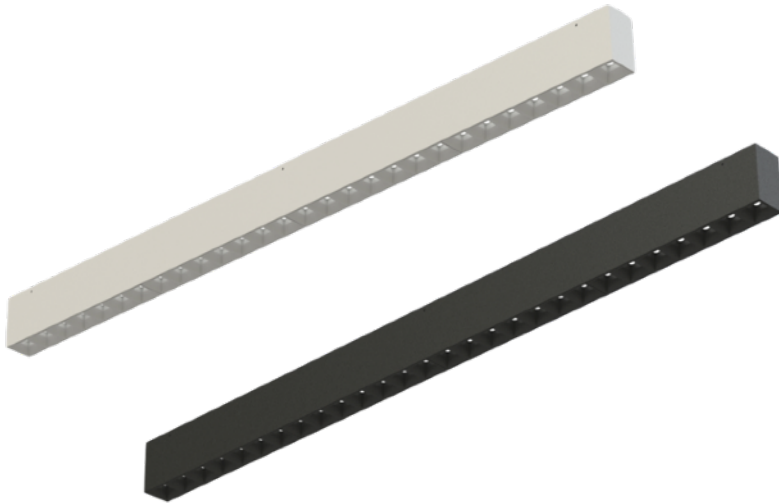

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.


We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L100** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 4 standard lengths in the range. Variety for all types of applications and spaces.

Our integrated driver system ensures the sleek square profile of the linear is maintained without the need for a remotely located power supply.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty




APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	15W	27W	15 - 27W
Lamp luminous flux*:	3010lm	5210lm	3010lm - 5210lm
Luminaire luminous flux*:	2468lm	4272lm	2468lm - 4272lm
Luminaire efficacy*:	165lm/W	158lm/W	158 - 165lm/W
Beam Angle:	65°, 90°, ASYM		65°, 90°, ASYM
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1123mm X 80mm X 45mm		1123mm X 80mm X 45mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 1.4m Integrated Driver

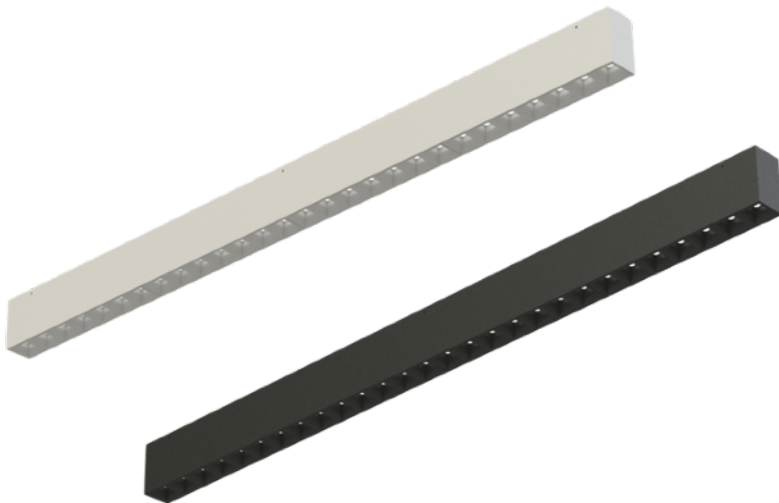

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.


We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L100** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 4 standard lengths in the range. Variety for all types of applications and spaces.

Our integrated driver system ensures the sleek square profile of the linear is maintained without the need for a remotely located power supply.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty




APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	19W	34W	19 - 34W
Lamp luminous flux*:	3760lm	6570lm	3760lm - 6570lm
Luminaire luminous flux*:	3083lm	5387lm	3083lm - 5387lm
Luminaire efficacy*:	162lm/W	158lm/W	158 - 162lm/W
Beam Angle:	65°, 90°, ASYM		65°, 90°, ASYM
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1403mm X 80mm X 45mm		1403mm X 80mm X 45mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 2.2m Integrated Driver

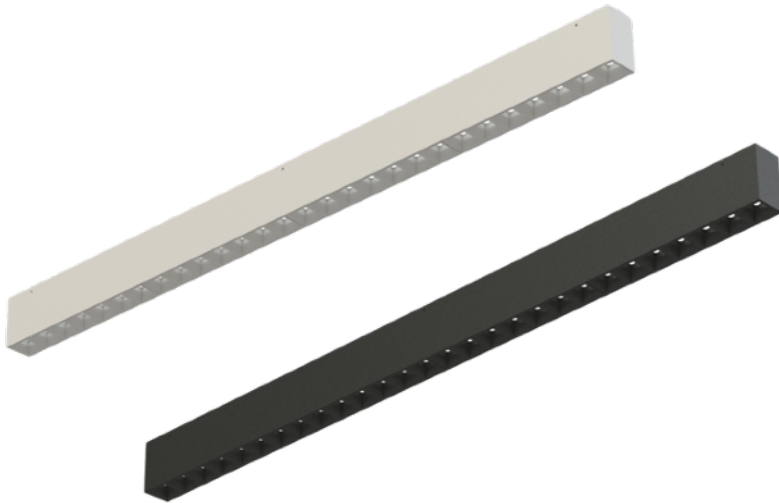

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.


We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L100** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 4 standard lengths in the range. Variety for all types of applications and spaces.

Our integrated driver system ensures the sleek square profile of the linear is maintained without the need for a remotely located power supply.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty




APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	30W	54W	30W- 54W
Lamp luminous flux*:	6020lm	10420lm	6020lm - 10420lm
Luminaire luminous flux*:	4936lm	8544lm	4936lm - 8544lm
Luminaire efficacy*:	165lm/W	158lm/W	158 - 165lm/W
Beam Angle:	65°, 90°, ASYM		65°, 90°, ASYM
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	2243mm X 80mm X 45mm		2243mm X 80mm X 45mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 0.6m External Driver

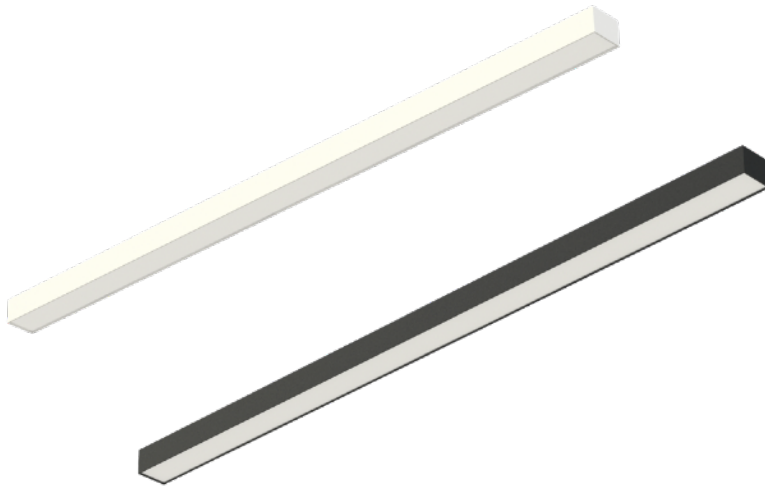

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.


Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty




APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	10W	14W	10 - 14W
Lamp luminous flux*:	1725lm	2405lm	1725lm - 2405lm
Luminaire luminous flux*:	1242lm	1732lm	1242lm - 1732lm
Luminaire efficacy*:	131lm/W	128lm/W	128 - 131lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	564mm X 50mm X 40mm		564mm X 50mm X 40mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 0.8m External Driver

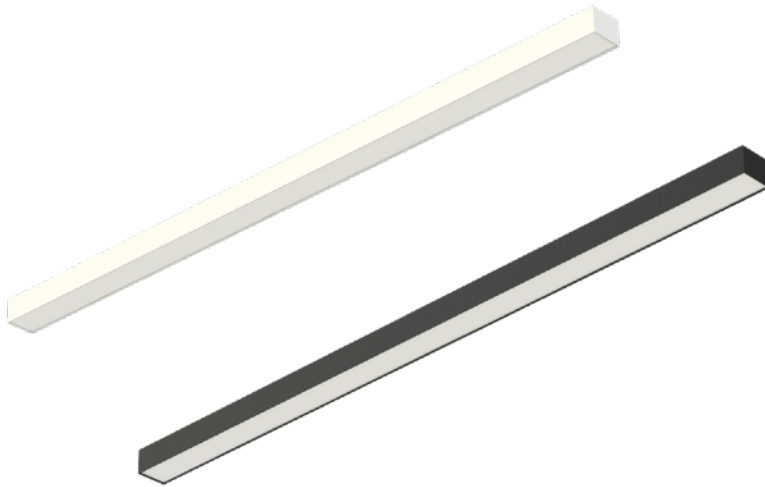

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty




APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	14W	20W	14 - 20W
Lamp luminous flux*:	2590lm	3610lm	2590lm - 3610lm
Luminaire luminous flux*:	1865lm	2599lm	1865lm - 2599lm
Luminaire efficacy*:	131lm/W	128lm/W	128 - 131lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	844mm X 50mm X 40mm		844mm X 50mm X 40mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 1.1m External Driver

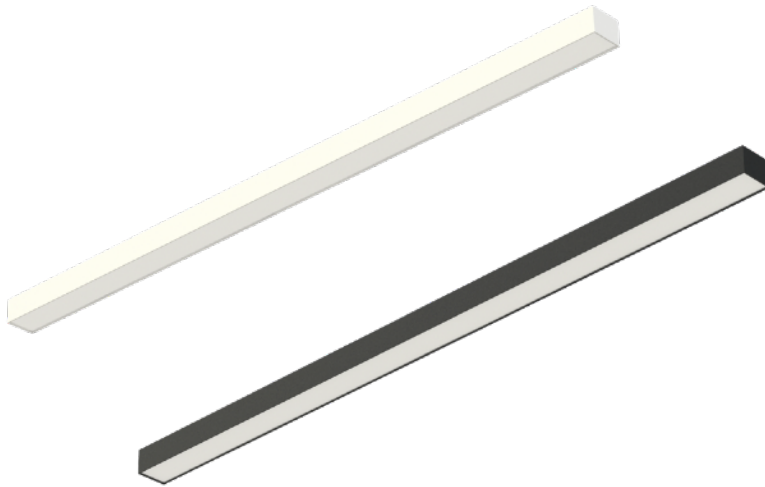

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.


Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty




APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	19W	27W	19 - 27W
Lamp luminous flux*:	3450lm	4810lm	3450lm - 4810lm
Luminaire luminous flux*:	2484lm	3463lm	2484lm - 3463lm
Luminaire efficacy*:	131lm/W	128lm/W	128 - 131lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1124mm X 50mm X 40mm		1124mm X 50mm X 40mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 1.4m External Driver

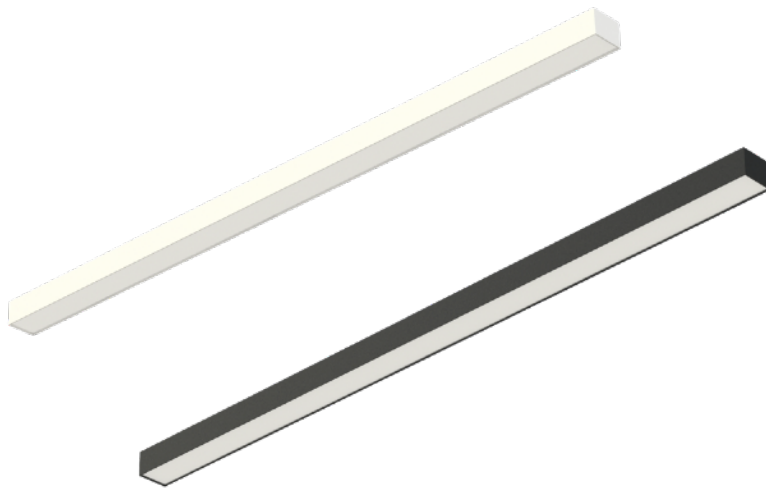

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty




APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	24W	34W	24 - 34W
Lamp luminous flux*:	4315lm	6015lm	4315lm - 6015lm
Luminaire luminous flux*:	3107lm	4331lm	3107lm - 4331lm
Luminaire efficacy*:	131lm/W	128lm/W	128 - 131lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1404mm X 50mm X 40mm		1404mm X 50mm X 40mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 1.7m External Driver

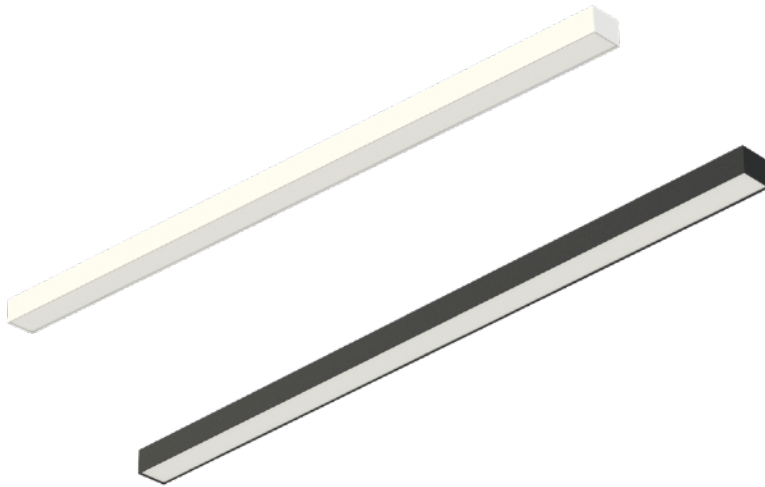

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty




APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	29W	41W	29 - 41W
Lamp luminous flux*:	5175lm	7215lm	5175lm - 7215lm
Luminaire luminous flux*:	3726lm	5195lm	3726lm - 5195lm
Luminaire efficacy*:	131lm/W	128lm/W	128 - 131lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1684mm X 50mm X 40mm		1684mm X 50mm X 40mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 2m External Driver

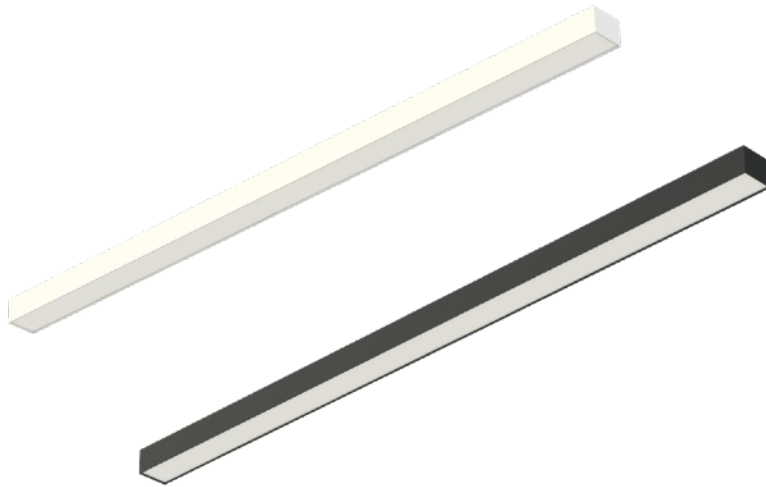

Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty



APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	33W	47W	33 - 47W
Lamp luminous flux*:	6040lm	8420lm	6040lm - 8420lm
Luminaire luminous flux*:	4530lm	6315lm	4530lm - 6315lm
Luminaire efficacy*:	136lm/W	134lm/W	134 - 136lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1964mm X 50mm X 40mm		1964mm X 50mm X 40mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 0.6m External Driver



Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty



APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	10W	14W	10 - 14W
Lamp luminous flux*:	1725lm	2405lm	1725lm - 2405lm
Luminaire luminous flux*:	1242lm	1732lm	1242lm - 1732lm
Luminaire efficacy*:	131lm/W	128lm/W	128 - 131lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	564mm X 35mm X 35mm		564mm X 35mm X 35mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 0.8m External Driver



Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty



APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	14W	20W	14 - 20W
Lamp luminous flux*:	2590lm	3610lm	2590lm - 3610lm
Luminaire luminous flux*:	1865lm	2599lm	1865lm - 2599lm
Luminaire efficacy*:	131lm/W	128lm/W	128 - 131lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	844mm X 35mm X 35mm		844mm X 35mm X 35mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 1.1m External Driver



Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.


Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty



APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	19W	27W	19 - 27W
Lamp luminous flux*:	3450lm	4810lm	3450lm - 4810lm
Luminaire luminous flux*:	2484lm	3463lm	2484lm - 3463lm
Luminaire efficacy*:	131lm/W	128lm/W	128 - 131lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1124mm X 35mm X 35mm		1124mm X 35mm X 35mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 1.4m External Driver



Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty



APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	24W	34W	24 - 34W
Lamp luminous flux*:	4315lm	6015lm	4315lm - 6015lm
Luminaire luminous flux*:	3107lm	4331lm	3107lm - 4331lm
Luminaire efficacy*:	131lm/W	128lm/W	128 - 131lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1404mm X 35mm X 35mm		1404mm X 35mm X 35mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 1.7m External Driver



Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.


Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty



APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	29W	41W	29 - 41W
Lamp luminous flux*:	5175lm	7215lm	5175lm - 7215lm
Luminaire luminous flux*:	3726lm	5195lm	3726lm - 5195lm
Luminaire efficacy*:	131lm/W	128lm/W	128 - 131lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1684mm X 35mm X 35mm		1684mm X 35mm X 35mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Surface/Suspended Linear - 2m External Driver



Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.


Our **L100 SERIES** linears are a great addition to any commercial and retail space. Linears provide seamless illumination perfect for general lighting applications at various lengths. Sleek profiles blend into any existing space providing illumination without distraction.

We have a variety of models within the **L100** range, to suit any aesthetic. The **L100** range can be surface mounted or suspended, as well as integrated and remote driver systems.

The **L104** can be configured with the choice of single colour or Tunable White illumination, coupled with the choice of 7 standard lengths in the range. Variety for all types of applications and spaces.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty



APPLICATIONS

Commercial, Retail, Office, General, Architectural

	Standard		SELECT
Luminaire total power (W)	33W	47W	33 - 47W
Lamp luminous flux*:	6040lm	8420lm	6040lm - 8420lm
Luminaire luminous flux*:	4530lm	6315lm	4530lm - 6315lm
Luminaire efficacy*:	136lm/W	134lm/W	134 - 136lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		3000 - 6500 Kelvin
Colour Rendering Index min:	80		80 - 90
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White Or Black		Optional
Dimensions:	1964mm X 35mm X 35mm		1964mm X 35mm X 35mm
Dimming:	Optional		Optional
Battery Back-Up:	Optional		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Post Tops



ULTRA
Light

The ORA family is part of our **ITECH** range of products, that have been designed and manufactured in South Africa for a variety of industrial and commercial applications.



ORA's unique 3-way or 4-way design incorporates 3 or 4 individual luminaires on a single post top. Providing complete variability and allowing multiple beam projections for large footprint applications.

Our **ITECH** range is specifically designed for high output environments, and all luminaires carry a standard five-year or 90000-hour (whichever comes first) warranty. In addition to this, all luminaire housings have a Mechanical Impact protection rating up to IK10 and carry a ten-year warranty.

Our superior Hybrid Lens technology allows us to project multiple blended beam angles within a single luminaire. Providing consistent illuminance and spreads, whilst reducing harsh glare and shadowing.

Our **SELECT** range allows for numerous non-standard customizations to any model within the range. Custom Power & Lumen outputs, Motion sensors, Building Management (BMS) integration, Daylight Harvesting capabilities, DALI control and Human-Centric adaptation.

Quality and Durability are at the heart of the **ITECH** range, encompassing superior illumination, low maintenance and significant ROI.

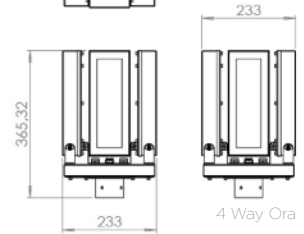

APPLICATIONS


Street, Large Area

	Standard	SELECT
Luminaire total power (W):	50 - 86W	Varies
Lamp luminous flux*:	7719 - 12864lm	Varies
Luminaire luminous flux*:	7101 - 11964lm	Varies
Luminaire efficacy*:	139lm/W	Varies
Beam Angle:	Hybrid (50°, 65°, 100°, 104°, MEW, TF)	Varies
Rated useful life*:	L80 B10 90000 hours	L80 B10 90000 hours
Correlated colour temperature*:	4000K	Varies
Colour Rendering Index min:	70	70 - 90
Body Construction:	Stainless Steel	Stainless Steel
Finish:	Stage 1 : E-Coated, Stage 2 : Powder Coated	Stage 1 : E-Coated, Stage 2 : Powder Coated
Body Colour:	Hammered Grey	Varies
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 3.5kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 3.5kV
Flicker Free control system (No Stroboscopic effect):	Yes < 4%	Yes < 4%
Additional surge protection:	Nominal surge current: 5- hit, 5KA: max: 1-hit: 10kA	Nominal surge current: 5- hit, 5KA: max: 1-hit: 10kA
Serviceable for repairs and maintenance:	Yes, up to component level	Yes, up to component level

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Email: sales@ultralightsa.co.za Website: www.ultralightsa.co.za Warranty is subject to our warranty policy, a copy of which is available on request

Troffers

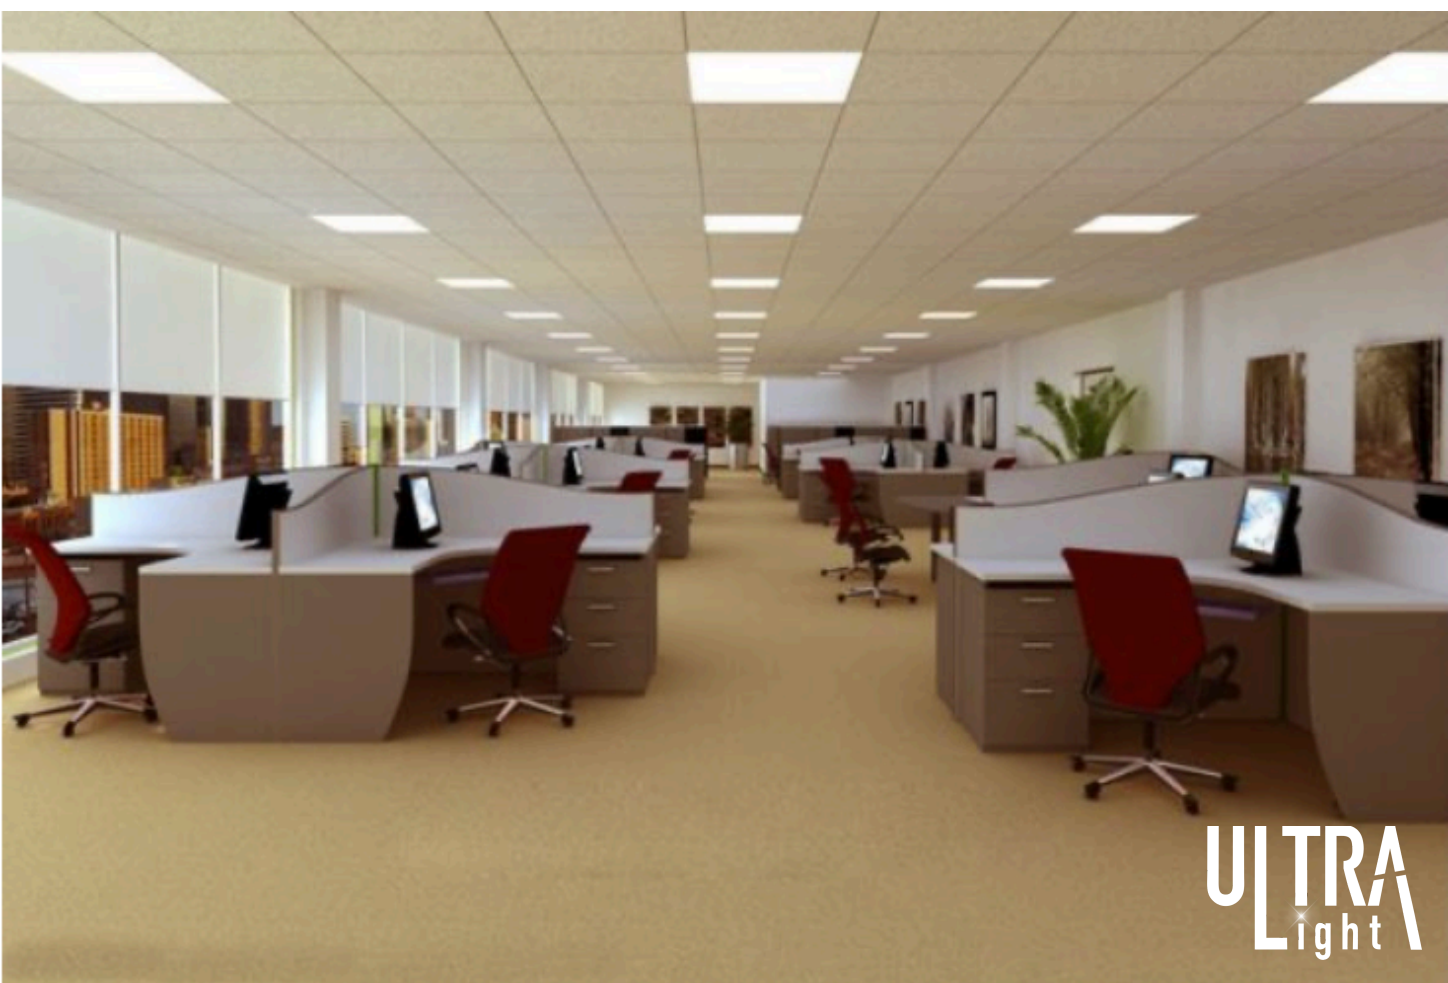

ULTRA
Light

Troffer-T101/2/3

Our **ECOLITE** range has a broad appeal and a variety of commercial applications.

The T100 Series is designed primarily for commercial environments with conventional drop ceilings. Standard ceiling panel sizes (600x600 and 1200x600) offer swift installation to any existing space. The T100 series has 3 model lines, each line providing unique light diffusion.

The T10 line: Prismatic Diffusion

The T11 line: Standard Diffusion



The T12 line: Anti-glare Diffusion

Each line has 3 variant offerings one, two or three-way illumination.

Our **SELECT** range allows for numerous non-standard customizations to any model within the range. Custom Power & Lumen outputs, Motion sensors, Building Management (BMS) integration, Daylight Harvesting capabilities, DALI control and Human-Centric adaptation.

A cost-effective solution offering high lumen efficacy and proven reliability.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

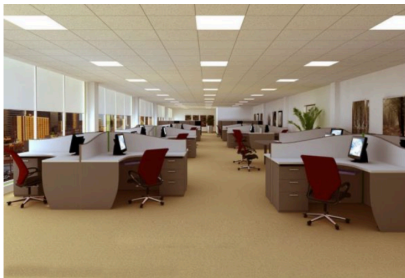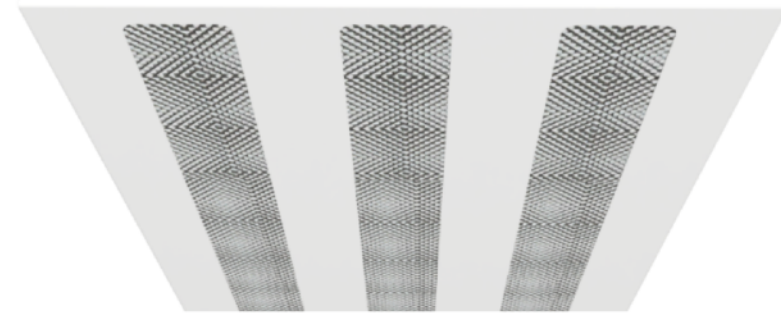

APPLICATIONS Commercial, Retail, Office

	Standard	SELECT
Luminaire total power (W)	13 - 77W	Optional
Lamp luminous flux*:	2361 - 14166lm	Optional
Luminaire luminous flux*:	1653 - 9916lm	Optional
Luminaire efficacy*:	128lm/W	Optional
Beam Angle:	120°	120°
Rated useful life*	L70 B50 50000 hours	50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin	2700 - 6500 Kelvin
Colour Rendering Index min:	80	70 - 97
Body Construction:	Mildsteel	Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White	Optional
Dimensions:	595mm X 595mm X 50mm / 1195mm X 1195mm X 50mm	595mm X 595mm X 50mm / 1195mm X 1195mm X 50mm
Dimming:	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes	Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Troffer-T111/2/3

Our **ECOLITE** range has a broad appeal and a variety of commercial applications.

The T100 Series is designed primarily for commercial environments with conventional drop ceilings. Standard ceiling panel sizes (600x600 and 1200x600) offer swift installation to any existing space. The T100 series has 3 model lines, each line providing unique light diffusion.

The T10 line: Prismatic Diffusion

The T11 line: Standard Diffusion


The T12 line: Anti-glare Diffusion

Each line has 3 variant offerings one, two or three-way illumination.

Our **SELECT** range allows for numerous non-standard customizations to any model within the range. Custom Power & Lumen outputs, Motion sensors, Building Management (BMS) integration, Daylight Harvesting capabilities, DALI control and Human-Centric adaptation.

A cost-effective solution offering high lumen efficacy and proven reliability.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.



APPLICATIONS Commercial, Retail, Office

	Standard	SELECT
Luminaire total power (W)	13 - 77W	Optional
Lamp luminous flux*:	2361 - 14166lm	Optional
Luminaire luminous flux*:	1653 - 9916lm	Optional
Luminaire efficacy*:	128lm/W	Optional
Beam Angle:	120°	120°
Rated useful life*	L70 B50 50000 hours	50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin	2700 - 6500 Kelvin
Colour Rendering Index min:	80	70 - 97
Body Construction:	Mildsteel	Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White	Optional
Dimensions:	595mm X 595mm X 50mm / 1195mm X 1195mm X 50mm	595mm X 595mm X 50mm / 1195mm X 1195mm X 50mm
Dimming:	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes	Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Troffer-T121/2/3

Our **ECOLITE** range has a broad appeal and a variety of commercial applications.

The T100 Series is designed primarily for commercial environments with conventional drop ceilings. Standard ceiling panel sizes (600x600 and 1200x600) offer swift installation to any existing space. The T100 series has 3 model lines, each line providing unique light diffusion.

The T10 line: Prismatic Diffusion

The T11 line: Standard Diffusion


The T12 line: Anti-glare Diffusion

Each line has 3 variant offerings one, two or three-way illumination.

Our **SELECT** range allows for numerous non-standard customizations to any model within the range. Custom Power & Lumen outputs, Motion sensors, Building Management (BMS) integration, Daylight Harvesting capabilities, DALI control and Human-Centric adaptation.

A cost-effective solution offering high lumen efficacy and proven reliability.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.



APPLICATIONS Commercial, Retail, Office

	Standard	SELECT
Luminaire total power (W)	13 - 77W	Optional
Lamp luminous flux*	2361 - 14166lm	Optional
Luminaire luminous flux*	1653 - 9916lm	Optional
Luminaire efficacy*	128lm/W	Optional
Beam Angle:	120°	120°
Rated useful life*	L70 B50 50000 hours	50000 - 100000 hours
Correlated colour temperature*	3000, 4000 or 5000 Kelvin	2700 - 6500 Kelvin
Colour Rendering Index min:	80	70 - 97
Body Construction:	Mildsteel	Mildsteel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White	Optional
Dimensions:	595mm X 595mm X 50mm / 1195mm X 1195mm X 50mm	595mm X 595mm X 50mm / 1195mm X 1195mm X 50mm
Dimming:	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes	Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Troffer



Our **ECOLITE** range has a broad appeal and a variety of commercial applications.



The T300 Series is designed primarily for commercial environments with conventional drop ceilings. Standard ceiling panel sizes (600x600) offer swift installation to any existing space

Our T301 series offers a anti-glare, yet full cylindrical centre illuminance, yielding a even light distribution.

Our **SELECT** range allows for numerous non-standard customizations to any model within the range. Custom Power & Lumen outputs, Motion sensors, Building Management (BMS) integration, Daylight Harvesting capabilities, DALI control and Human-Centric adaptation.

A cost-effective solution offering high lumen efficacy and proven reliability.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

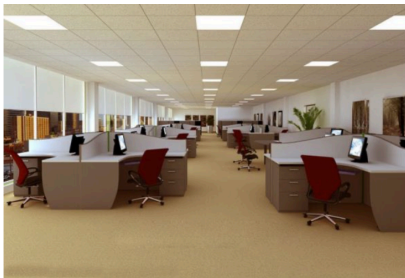

APPLICATIONS

Commercial, Retail, Office

	Standard	SELECT
Luminaire total power (W)	16 - 47W	Optional
Lamp luminous flux*:	2950 - 8850lm	Optional
Luminaire luminous flux*:	2065 - 6195lm	Optional
Luminaire efficacy*:	131lm/W	Optional
Beam Angle:	120°	120°
Rated useful life*	L70 B50 50000 hours	50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin	2700 - 6500 Kelvin
Colour Rendering Index min:	80	70 - 97
Body Construction:	Polycarbonate	Polycarbonate
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White	White
Dimensions:	595mm X 595mm X 86mm	595mm X 595mm X 86mm
Dimming:	No	Optional
Additional surge protection:	No	Optional
Serviceable for repairs and maintenance:	Yes	Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Vapourproofs



ULTRA
Light



Vapour Proof- 4Ft



Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial and Retail sectors alike.

With a functional design and uniform appearance, our V100 series are perfect for car parks, petrol stations, tunnels and warehouses. The Vapour Proof enclosure is IP65 rated and provides flexibility in installation; capable of ceiling and wall mounting and is available in standard 4ft.

The V101 series vapour proof provides consistent illumination for medium to large areas. Perfect for general illumination in various cover spaces

Suitable for environments subject to moisture and dust, the V100 series offers superior operating lifespan and low maintenance requirements.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

APPLICATIONS

Factory, General Area, Parking Garages

	Standard	
Luminaire total power (W)	35W	50W
Lamp luminous flux*	5048lm	6896lm
Luminaire luminous flux*	4300lm	5900lm
Luminaire efficacy*	123lm/W	118lm/W
Beam Angle:	120°	
Rated useful life*	L70 B50 50000 hours	
Correlated colour temperature*:	4000 or 5000 Kelvin	
Colour Rendering Index min:	80	
Body Construction:	Polycarbonate	
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	
Body Colour:	Grey	
Dimensions:	1168mm X 94mm X 89mm	
Dimming:	Optional	
Battery Back-Up:	Optional	
Serviceable for repairs and maintenance:	Yes	

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Vapour Proof - 2Ft



Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial and Retail sectors alike.

With a functional design and uniform appearance, our V200 series are perfect for car parks, petrol stations, tunnels and warehouses. The Vapour Proof enclosure is IP66 rated and provides flexibility in installation; capable of ceiling and wall mounting and is available in standard 2ft, 4ft, 5ft.

The V201 series vapour proof provides consistent illumination for medium to large areas. Perfect for general illumination in various cover spaces

Suitable for environments subject to moisture and dust, the V200 series offers superior operating lifespan and low maintenance requirements.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.



APPLICATIONS

Factory, General Area, Parking Garages

	Standard	
	16W	23W
Luminaire total power (W)	16W	23W
Lamp luminous flux*:	2832lm	4145lm
Luminaire luminous flux*:	2549lm	3768lm
Luminaire efficacy*:	159lm/W	163lm/W
Beam Angle:	120°	
Rated useful life*	L70 B50 50000 hours	
Correlated colour temperature*:	4000 or 5000 Kelvin	
Colour Rendering Index min:	80	
Body Construction:	Polycarbonate	
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	
Body Colour:	Grey	
Dimensions:	660mm X 101mm X 101mm	
Dimming:	Optional	
Battery Back-Up:	Optional	
Serviceable for repairs and maintenance:	Yes	

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%



Vapour Proof - 4Ft




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial and Retail sectors alike.

With a functional design and uniform appearance, our V200 series are perfect for car parks, petrol stations, tunnels and warehouses. The Vapour Proof enclosure is IP66 rated and provides flexibility in installation; capable of ceiling and wall mounting and is available in standard 2ft, 4ft, 5ft.

The V201 series vapour proof provides consistent illumination for medium to large areas. Perfect for general illumination in various cover spaces

Suitable for environments subject to moisture and dust, the V200 series offers superior operating lifespan and low maintenance requirements.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.



APPLICATIONS

Factory, General Area, Parking Garages

	Standard	
Luminaire total power (W)	35W	50W
Lamp luminous flux*:	5212lm	6990lm
Luminaire luminous flux*:	4899lm	6570lm
Luminaire efficacy*:	140lm/W	131lm/W
Beam Angle:	120°	
Rated useful life*	L70 B50 50000 hours	
Correlated colour temperature*:	4000 or 5000 Kelvin	
Colour Rendering Index min:	80	
Body Construction:	Polycarbonate	
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	
Body Colour:	Grey	
Dimensions:	1277mm X 101mm X 101mm	
Dimming:	Optional	
Battery Back-Up:	Optional	
Serviceable for repairs and maintenance:	Yes	

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%



Vapour Proof - 5Ft




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial and Retail sectors alike.

With a functional design and uniform appearance, our V200 series are perfect for car parks, petrol stations, tunnels and warehouses. The Vapour Proof enclosure is IP66 rated and provides flexibility in installation; capable of ceiling and wall mounting and is available in standard 2ft, 4ft, 5ft.

The V201 series vapour proof provides consistent illumination for medium to large areas. Perfect for general illumination in various cover spaces

Suitable for environments subject to moisture and dust, the V200 series offers superior operating lifespan and low maintenance requirements.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.



APPLICATIONS

Factory, General Area, Parking Garages

	Standard	
Luminaire total power (W)	44W	62W
Lamp luminous flux*:	6750lm	8974lm
Luminaire luminous flux*:	6344lm	8435lm
Luminaire efficacy*:	144lm/W	136lm/W
Beam Angle:	120°	
Rated useful life*	L70 B50 50000 hours	
Correlated colour temperature*:	4000 or 5000 Kelvin	
Colour Rendering Index min:	80	
Body Construction:	Polycarbonate	
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	
Body Colour:	Grey	
Dimensions:	1573mm X 101mm X 101mm	
Dimming:	Optional	
Battery Back-Up:	Optional	
Serviceable for repairs and maintenance:	Yes	

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Vapour Proof - 2Ft




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial and Retail sectors alike.

With a functional design and uniform appearance, our V400 series are perfect for car parks, petrol stations, tunnels and warehouses. The Vapour Proof enclosure comprises of an aluminium body and a polycarbonate lens and is IP65 rated and provides flexibility in installation; capable of ceiling and wall mounting and is available in standard 2ft, 4ft.

The V401 series vapour proof provides consistent illumination for medium to large areas by using optics for multiple beam angles. Perfect for general illumination in various cover spaces

Suitable for environments subject to moisture and dust, the V400 series offers superior operating lifespan and low maintenance requirements.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

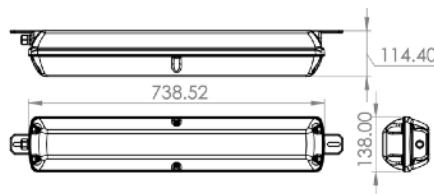

APPLICATIONS

Factory, General Area, Parking Garages

	Standard		
Luminaire total power (W)	20W	30W	50W
Lamp luminous flux*	4025lm	5625lm	7660lm
Luminaire luminous flux*	3800lm	5343lm	7300lm
Luminaire efficacy*	190lm/W	178lm/W	146lm/W
Beam Angle:	ASYM, SYM, 30°, 60°, 80°, 110°		
Rated useful life*	L80 B10 50000 hours		
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		
Colour Rendering Index min:	80		
Body Construction:	Die Cast Aluminium Body With Polycarbonate Lens		
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		
Body Colour:	Black		
Dimensions:	739mm X 138mm X 114mm		
Dimming:	Optional		
Battery Back-Up:	Optional		
Serviceable for repairs and maintenance:	Yes		

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Vapour Proof - 2Ft




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial and Retail sectors alike.

With a functional design and uniform appearance, our V400 series are perfect for car parks, petrol stations, tunnels and warehouses. The Vapour Proof enclosure comprises of an aluminium body and a polycarbonate lens and is IP65 rated and provides flexibility in installation; capable of ceiling and wall mounting and is available in standard 2ft, 4ft.

The V401 series vapour proof provides consistent illumination for medium to large areas. Perfect for general illumination in various cover spaces

Suitable for environments subject to moisture and dust, the V400 series offers superior operating lifespan and low maintenance requirements.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

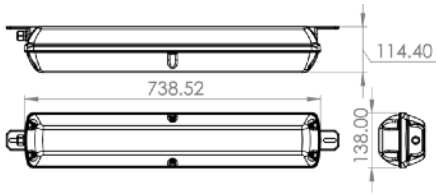

APPLICATIONS

Factory, General Area, Parking Garages

	Standard		
Luminaire total power (W)	20W	30W	50W
Lamp luminous flux*:	4050lm	4550lm	8150m
Luminaire luminous flux*:	3250lm	3650lm	6500lm
Luminaire efficacy*:	163lm/W	122lm/W	130lm/W
Beam Angle:	120°		
Rated useful life*	L80 B10 50000 hours		
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		
Colour Rendering Index min:	80		
Body Construction:	Die Cast Aluminium Body With Polycarbonate Lens		
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		
Body Colour:	Black		
Dimensions:	739mm X 138mm X 114mm		
Dimming:	Optional		
Battery Back-Up:	Optional		
Serviceable for repairs and maintenance:	Yes		

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Vapour Proof - 2Ft




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial and Retail sectors alike.

With a functional design and uniform appearance, our V400 series are perfect for car parks, petrol stations, tunnels and warehouses. The Vapour Proof enclosure comprises of an aluminium body and a polycarbonate lens and is IP65 rated and provides flexibility in installation; capable of ceiling and wall mounting and is available in standard 2ft, 4ft.

The V401 series vapour proof provides consistent illumination for medium to large areas. Perfect for general illumination in various cover spaces

Suitable for environments subject to moisture and dust, the V400 series offers superior operating lifespan and low maintenance requirements.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

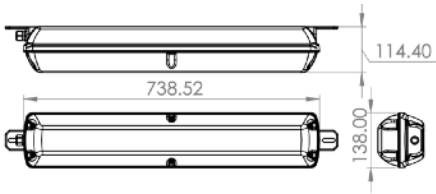

APPLICATIONS

Factory, General Area, Parking Garages

	Standard		
Luminaire total power (W)	20W	30W	50W
Lamp luminous flux*:	4050lm	4550lm	8150m
Luminaire luminous flux*:	3650lm	4050lm	7300lm
Luminaire efficacy*:	183lm/W	135lm/W	146lm/W
Beam Angle:	120°		
Rated useful life*	L80 B10 50000 hours		
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		
Colour Rendering Index min:	80		
Body Construction:	Die Cast Aluminium Body With Polycarbonate Lens		
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		
Body Colour:	Black		
Dimensions:	739mm X 138mm X 114mm		
Dimming:	Optional		
Battery Back-Up:	Optional		
Serviceable for repairs and maintenance:	Yes		

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Wall Lights



ULTRA
Light

Walkway





Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Designed for outdoor environments with complete IP54 protection. Complete 316 Stainless Steel construction provides unrivalled exterior protection against the harshest of climates. Recessed mounting provides seamless integration without obtrusion. Stainless Steel mounting boxes provide added ingress protection and ease of installation.

The W100 provides illumination in walkways, stairs and other low-level applications. The concealed light source minimizes glare and creates sufficient projection on to the intended area, with the option of low, medium and high lumen outputs to suit your specific application

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

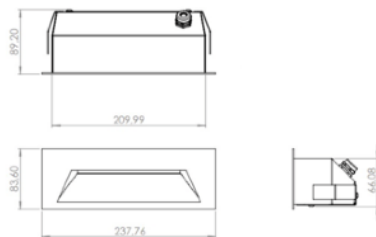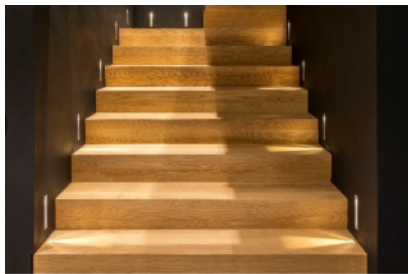

APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		Select
Luminaire total power (W)	3W	6W	3W - 6W
Lamp luminous flux*:	505lm	1035lm	505 - 1035lm
Luminaire luminous flux*:	355lm	725lm	355 - 725lm
Luminaire efficacy*:	118lm/W	125lm/W	118 - 125lm/W
Beam Angle:	120°		120°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	80		70 - 97
Body Construction:	316 Stainless Steel		316 Stainless Steel
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	Black		Optional
Dimensions:	238mm X 84mm X 66mm		238mm X 84mm X 66mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%



Up And Down Wall Light (Dual Beam)





Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W200 SERIES** wall washers have been designed according to a simple philosophy. Clean lines and geometric shapes are introduced to compliment any existing architectural genre and environment. The result is both minimal and distinct.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

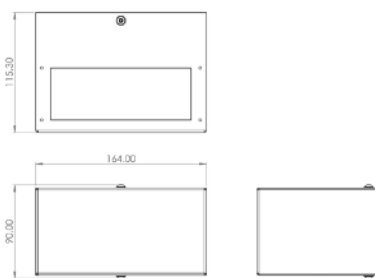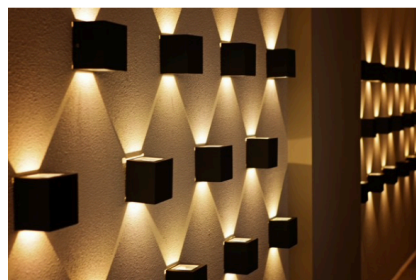

APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		SELECT
Luminaire total power (W)	11W (5.5W Up, 5.5W Down)	16W (8W Up, 8W Down)	11W - 16W
Lamp luminous flux*	2190lm	2940lm	2190 - 2940lm
Luminaire luminous flux*	1484lm	2352lm	1484-2352lm
Luminaire efficacy*	135lm/W	147lm/W	135-147lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	80		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	164mm X 115mm X 90mm		164mm X 115mm X 90mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%



Up Or Down Wall Light (Single Beam)





Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W200 SERIES** wall washers have been designed according to a simple philosophy. Clean lines and geometric shapes are introduced to compliment any existing architectural genre and environment. The result is both minimal and distinct.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

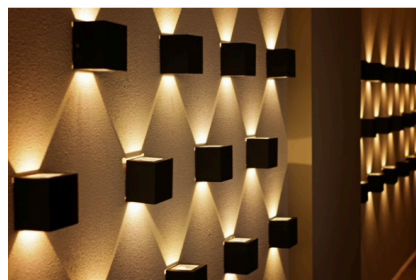

APPLICATIONS


Commercial, Retail, Architectural, Facade, General

	Standard		Select
Luminaire total power (W)	5W	8W	5W - 8W
Lamp luminous flux*	1060lm	1470lm	1060 - 1470lm
Luminaire luminous flux*	742lm	1029lm	742 - 1029lm
Luminaire efficacy*	148lm/W	129lm/W	129 - 148lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	80		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	164mm X 115mm X 90mm		164mm X 115mm X 90mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%



Up And Down Wall Light (Dual Beam)

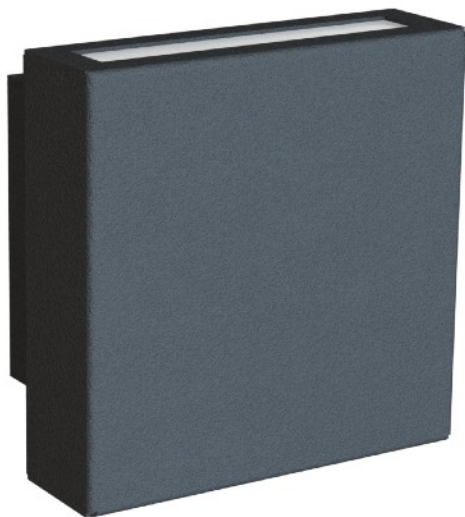



Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W200 SERIES** wall washers have been designed according to a simple philosophy. Clean lines and geometric shapes are introduced to compliment any existing architectural genre and environment. The result is both minimal and distinct.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

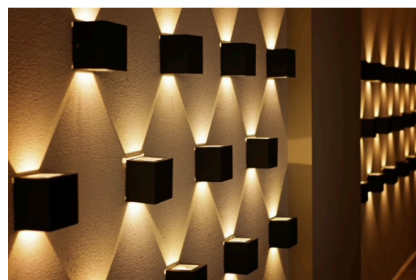

APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard	SELECT
Luminaire total power (W)	4W (2W Up, 2W Down)	4W - 8W
Lamp luminous flux*	740lm	740 - 1480lm
Luminaire luminous flux*	518lm	518 - 1036lm
Luminaire efficacy*	130lm/W	130lm/W
Beam Angle:	120°	15° - 90°
Rated useful life*	L70 B50 50000 hours	50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin	2700 - 6500 Kelvin
Colour Rendering Index min:	80	70 - 97
Body Construction:	Aluminium	Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black	Optional
Dimensions:	104mm X 104mm X 64mm	104mm X 104mm X 64mm
Dimming:	No	No
Serviceable for repairs and maintenance:	Yes	Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%



Up Or Down Wall Light (Single Beam)





Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W200 SERIES** wall washers have been designed according to a simple philosophy. Clean lines and geometric shapes are introduced to compliment any existing architectural genre and environment. The result is both minimal and distinct.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

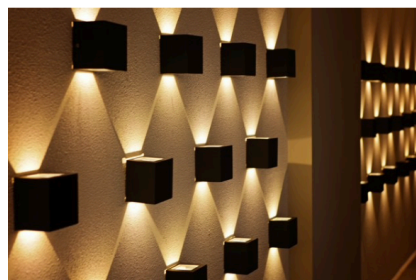

APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard	SELECT
Luminaire total power (W)	2W	2W - 6W
Lamp luminous flux*	370lm	370 - 1110lm
Luminaire luminous flux*	259lm	259 - 777lm
Luminaire efficacy*	130lm/W	130lm/W
Beam Angle:	120°	15° - 90°
Rated useful life*	L70 B50 50000 hours	50000 - 100000 hours
Correlated colour temperature*	3000, 4000 or 5000 Kelvin	2700 - 6500 Kelvin
Colour Rendering Index min:	80	70 - 97
Body Construction:	Aluminium	Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black	Optional
Dimensions:	104mm X 104mm X 64mm	104mm X 104mm X 64mm
Dimming:	No	No
Serviceable for repairs and maintenance:	Yes	Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up And Down Wall Light (Dual Beam)




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.



APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		Select
Luminaire total power (W)	22W (11W Up, 11W Down)	33W (16.5W Up, 16.5W Down)	22 - 33W
Lamp luminous flux*:	3632lm	5042lm	3632 - 5042lm
Luminaire luminous flux*:	2542lm	3529lm	2542 - 3529lm
Luminaire efficacy*:	116lm/W	107lm/W	116 - 107lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	216mm X 102mm X 134mm		216mm X 102mm X 134mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up Or Down Wall Light (Single Beam)





Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

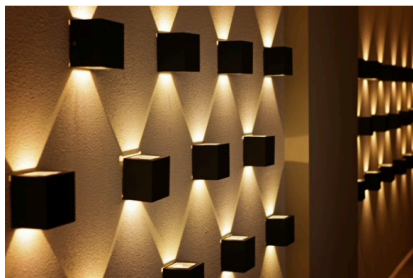

APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		Select
Luminaire total power (W)	11W	17W	11 - 17W
Lamp luminous flux*	1816lm	2521lm	1816 - 2521lm
Luminaire luminous flux*	1271lm	1765lm	1271 - 1765lm
Luminaire efficacy*	115lm/W	103lm/W	103 - 115lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	216mm X 102mm X 134mm		216mm X 102mm X 134mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up And Down Wall Light (Dual Beam)





Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

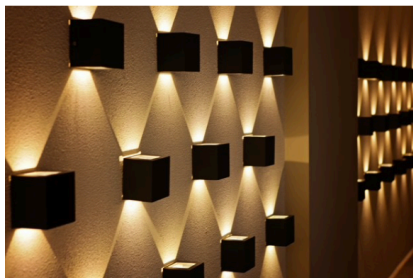

APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		SEELECT
Luminaire total power (W)	22W (11W Up, 11W Down)	33W (16.5W Up, 16.5W Down)	22 - 33W
Lamp luminous flux*	3632lm	5042lm	3632 - 5042lm
Luminaire luminous flux*	2542lm	3529lm	2542 - 3529lm
Luminaire efficacy*	116lm/W	107lm/W	116 - 107lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	316mm X 102mm X 134mm		316mm X 102mm X 134mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up Or Down Wall Light (Single Beam)





Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

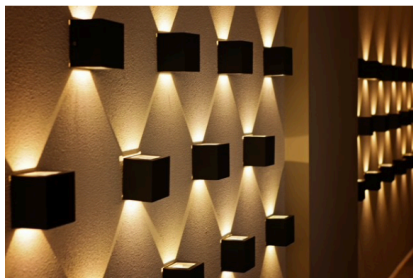

APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		SELECT
Luminaire total power (W)	11W	17W	11 - 17W
Lamp luminous flux*	1816lm	2521lm	1816 - 2521lm
Luminaire luminous flux*	1271lm	1765lm	1271 - 1765lm
Luminaire efficacy*	115lm/W	103lm/W	103 - 115lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	316mm X 102mm X 134mm		316mm X 102mm X 134mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up And Down Wall Light (Dual Beam)




Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.



APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		SELECT
Luminaire total power (W)	22W (11W Up, 11W Down)	33W (16.5W Up, 16.5W Down)	22 - 33W
Lamp luminous flux*	3632lm	5042lm	3632 - 5042lm
Luminaire luminous flux*	2542lm	3529lm	2542 - 3529lm
Luminaire efficacy*	116lm/W	107lm/W	116 - 107lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	416mm X 102mm X 134mm		416mm X 102mm X 134mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up Or Down Wall Light (Single Beam)





Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

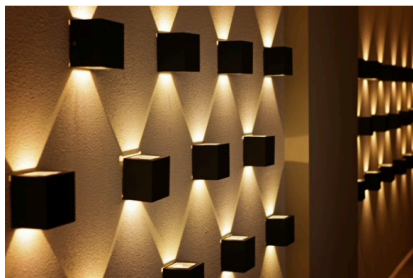


APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		SELECT
Luminaire total power (W)	11W	17W	11 - 17W
Lamp luminous flux*	1816lm	2521lm	1816 - 2521lm
Luminaire luminous flux*	1271lm	1765lm	1271 - 1765lm
Luminaire efficacy*	115lm/W	103lm/W	103 - 115lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	416mm X 102mm X 134mm		416mm X 102mm X 134mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up And Down Wall Light (Dual Beam)

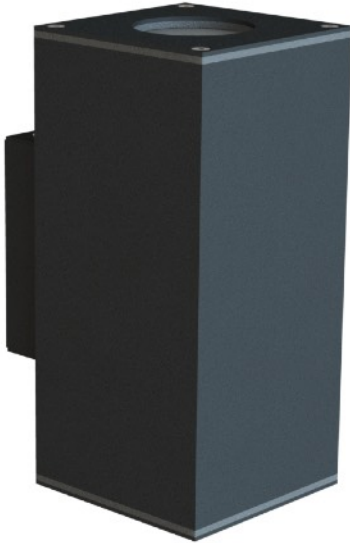


Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete 316 Stainless Steel construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.




APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		SELECT
Luminaire total power (W)	22W (11W Up, 11W Down)	33W (16.5W Up, 16.5W Down)	22 - 33W
Lamp luminous flux*	3632lm	5042lm	3632 - 5042lm
Luminaire luminous flux*	2542lm	3529lm	2542 - 3529lm
Luminaire efficacy*	116lm/W	107lm/W	116 - 107lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	216mm X 100mm X 132mm		216mm X 100mm X 132mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up Or Down Wall Light (Single Beam)

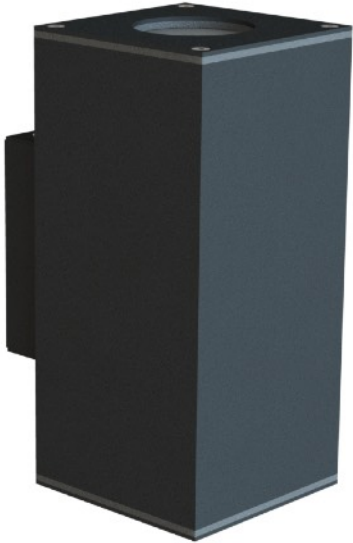


Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.

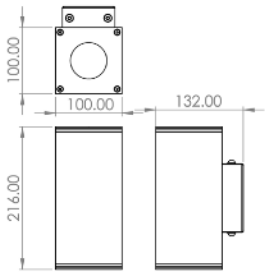


APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		SELECT
Luminaire total power (W)	11W	17W	11 - 17W
Lamp luminous flux*	1816lm	2521lm	1816 - 2521lm
Luminaire luminous flux*	1271lm	1765lm	1271 - 1765lm
Luminaire efficacy*	115lm/W	103lm/W	103 - 115lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	216mm X 100mm X 132mm		216mm X 100mm X 132mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up And Down Wall Light (Dual Beam)

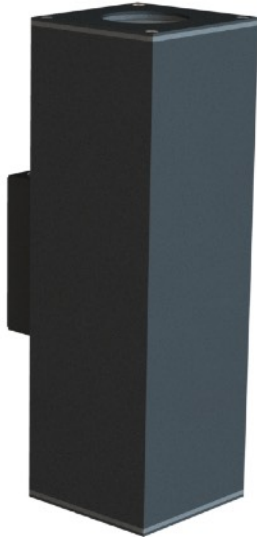


Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.




APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		SELECT
Luminaire total power (W)	22W (11W Up, 11W Down)	33W (16.5W Up, 16.5W Down)	22 - 33W
Lamp luminous flux*	3632lm	5042lm	3632 - 5042lm
Luminaire luminous flux*	2542lm	3529lm	2542 - 3529lm
Luminaire efficacy*	116lm/W	107lm/W	116 - 107lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	316mm X 100mm X 132mm		316mm X 100mm X 132mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up Or Down Wall Light (Single Beam)

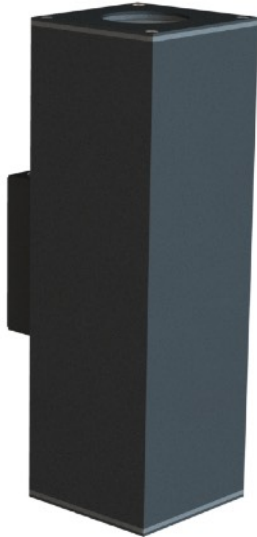


Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.




APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		SELECT
Luminaire total power (W)	11W	17W	11 - 17W
Lamp luminous flux*	1816lm	2521lm	1816 - 2521lm
Luminaire luminous flux*	1271lm	1765lm	1271 - 1765lm
Luminaire efficacy*	115lm/W	103lm/W	103 - 115lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	316mm X 100mm X 132mm		316mm X 100mm X 132mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up And Down Wall Light (Dual Beam)

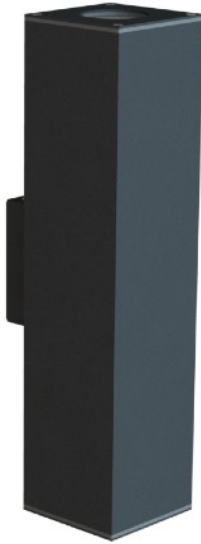


Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.

Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.

All **ECOLITE** products come standard with a 3-year/50000 hour warranty.




APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		SELECT
Luminaire total power (W)	22W (11W Up, 11W Down)	33W (16.5W Up, 16.5W Down)	22 - 33W
Lamp luminous flux*	3632lm	5042lm	3632 - 5042lm
Luminaire luminous flux*	2542lm	3529lm	2542 - 3529lm
Luminaire efficacy*	116lm/W	107lm/W	116 - 107lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	416mm X 100mm X 132mm		416mm X 100mm X 132mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%

Up Or Down Wall Light (Single Beam)

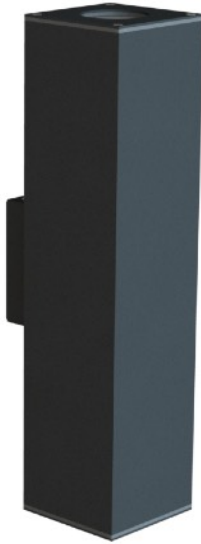


*Our **ECOLITE** range has a broad appeal and a variety of applications. Commercial, Retail and Architectural sectors alike.*

*Our **W300 SERIES** wall washers provide a distinct feature on any wall. The curved cylindrical form creates a bold feature to any space and is designed to stand out rather than blend in. Optional beam angles can provide wide wash or narrow beams depending on your preference.*

Our wall washers have been specifically designed and constructed at the highest levels to produce industry leading performance. Complete aluminium construction provides unrivalled exterior protection against the harshest of climates. Brilliant illuminance ensures less fittings can be used to illuminate the same area.

*Apart from our standard Matte Black, Our **SELECT** line provides an extended range of internal components, colours and finishes to suit any environment.*

*All **ECOLITE** products come standard with a 3-year/50000 hour warranty.*



APPLICATIONS

Commercial, Retail, Architectural, Facade, General

	Standard		SELECT
Luminaire total power (W)	11W	17W	11 - 17W
Lamp luminous flux*	1816lm	2521lm	1816 - 2521lm
Luminaire luminous flux*	1271lm	1765lm	1271 - 1765lm
Luminaire efficacy*	115lm/W	103lm/W	103 - 115lm/W
Beam Angle:	120°		15° - 90°
Rated useful life*	L70 B50 50000 hours		50000 - 100000 hours
Correlated colour temperature*:	3000, 4000 or 5000 Kelvin		2700 - 6500 Kelvin
Colour Rendering Index min:	90		70 - 97
Body Construction:	Aluminium		Aluminium
Built-in driver protection:	Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV		Voltage fluctuation, overheating, short circuit, overloads, voltage spikes up to 2kV
Body Colour:	White or Black		Optional
Dimensions:	416mm X 100mm X 132mm		416mm X 100mm X 132mm
Dimming:	No		Optional
Serviceable for repairs and maintenance:	Yes		Yes

Due to the rapid improvements taking place in technology, Ultra Light SA reserves the right to adapt or alter any product to improve reliability or performance without prior notice. All values marked with an * are rated values. The nominal flux is based on LED manufacturer's data @ Tsp 85°C. Actual flux output of the luminaire is subject to environmental conditions of the site and the optical efficiency of the luminaire. Luminous flux and electrical load are subject to an initial tolerance of +/- 10%